



GROOM

Gliders for Research, Ocean Observation and Management
FP7-Infra-2011-2.1.1 "Design Studies"

Deliverable D5.2

Sensors for gliders: existing, under development, and future sensors

Due date of deliverable: 30/09/2013

Actual submission date: 07/11/2013

Final update: 15/02/2015

Partner responsible: OC-UCY

Classification: PU

Grant Agreement Number: 284321

Contract Start Date: October 1st, 2011

Duration: 36 Months

Project Coordinator: UPMC

Partners: UPMC, OC-UCY, GEOMAR, HZG, AWI, UT, FMI, CNRS, IFREMER, HCMR, CMRE, OGS, UIB, NERSC, CSIC, PLOCAN, SAMS, UEA, NERC.

Project website address <http://www.groom-fp7.eu>

Table of contents

I.	Introduction	5
I.A.	Objectives	5
I.B.	General overview	5
I.C.	Sensor readiness	7
II.	Mission-proved, commercially available sensors for gliders	13
II.A.	Pressure, conductivity and temperature	13
II.A.1.	Sea-Bird Glider Payload CTDs	13
II.A.2.	Fin-cell GCTD	13
II.B.	Dissolved Oxygen (DO)	17
II.B.1.	Aanderaa DO optode (3880, 4831F)	17
II.B.2.	Sea-Bird DO sensor (SBE-43F)	17
II.B.3.	RINKO III Fast DO sensor	17
II.C.	Chlorophyll a fluorescence	20
II.C.1.	WETLabs ECO Puck (models including FL designation)	20
II.C.2.	Seapoint Chlorophyll Fluorometer	20
II.D.	Phycobilins (phycocyanin, phycoerythrin)	21
II.D.1.	WETLabs ECO Puck (models including FL designation)	21
II.E.	Turbidity backscatter	22
II.E.1.	WETLabs ECO Puck (models including BB designation)	22
II.E.2.	WETLabs Beam Attenuation Meter	22
II.E.3.	Seapoint Turbidity Meter	22
II.F.	Chromophoric dissolved organic matter (CDOM) fluorescence	25
II.F.1.	WETLabs ECO Puck (models including FL designation)	25
II.G.	Current	26
II.G.1.	Nortek AD2CP	26
II.G.2.	Nortek Aquadopp	26
II.G.3.	Teledyne RDI Explorer Doppler Velocity Log (DVL)	26
II.G.4.	Teledyne RDI 600 kHz Explorer ADCP	27
II.H.	Radiance, irradiance and PAR	29
II.H.1.	Satlantic AUV Irradiance sensor (OCR504-ICSW)	29
II.H.2.	Satlantic AUV Radiance sensor (OCR504-R10W)	29
II.H.3.	Biospherical Instruments PAR sensor (QSP 2000 series)	29
II.H.4.	Satlantic PAR sensor	29
II.I.	Animal biomass and presence	31
II.I.1.	Imagenex 853 Echosounder	31
II.I.2.	VEMCO Mobile Transceiver (VMT)	31
II.I.3.	SonTek 760 kHz ADP	32
II.J.	Marine mammal detection	33
II.J.1.	High Tech Inc. HTI-99-HF hydrophone (PAAM system)	33
II.J.2.	WHOI Digital Acoustic Monitoring Device (DMON)	33
II.K.	Turbulence	34
II.K.1.	Rockland SI MicroRider-1000 (MR-1000-6)	34
II.K.2.	Nortek Aquadopp HR ADCP	34
II.L.	Wind	36
II.L.1.	Greeneridge Sciences Inc. Acousonde	36

D5.2

II.M.	Nitrate (NO ₃)	38
II.M.1.	Satlantic SUNA v2	38
III.	Prototypes and sensors in development for gliders	40
III.A.	Radioactivity	40
III.A.1.	Amptek Gamma-Rad NaI Scintillation Probe	40
III.B.	Video imagery	40
III.B.1.	Mounted digital video cameras.....	40
III.C.	Multiple optical properties	40
III.C.1.	Turner Designs Cyclops sensors	40
IV.	Readily adaptable sensors for glider use	41
IV.A.	Overview	41
IV.B.	Nutrients	42
IV.B.1.	SubChem APNA	42
IV.B.2.	SubChem ChemFIN.....	42
IV.B.3.	SubChem MarChem	42
IV.B.4.	SUV-6 nitrate sensor.....	42
IV.C.	Unexploded ordnance	45
IV.C.1.	NRL/SubChem Systems ordinance immunosensor	45
IV.D.	Harmful algal bloom (HAB) toxins.....	46
IV.D.1.	SubChem MarChem	46
IV.E.	Carbon dioxide (pCO ₂).....	47
IV.E.1.	Contros HydroC™ CO ₂	47
IV.F.	Methane (CH ₄)	47
IV.F.1.	CONTROS HydroC™ CH ₄	47
IV.G.	Hydrocarbons.....	47
IV.G.1.	CONTROS HydroC™ PAH.....	47
IV.G.2.	WETLabs Eco Puck (models including FL designation).....	47
IV.G.3.	TriOS Optical Sensors EnviroFlu-HC	50
IV.G.4.	CNRS/MIO MiniFluo-UV fluorometer.....	51
IV.H.	Bioluminescence	52
IV.H.1.	Underwater Bioluminescence Assessment Tool (UBAT)	52
IV.I.	Marine mammal detection.....	54
IV.I.1.	SIO High-frequency Acoustic Recording Package (HARP)	54
V.	Desired sensors	55
V.A.	Metals.....	55
V.B.	Organic pollutants	55
V.C.	Particle and plankton size distributions.....	55
V.D.	Underwater noise	55
VI.	Bibliography	56

D5.2

Contributors and acknowledgments

This report was prepared as part of Task 5.2 (Glider payload assessment) of Work Package 5 (Observatory Infrastructure) of GROOM.

Angelos Hannides of the Oceanography Center, University of Cyprus (OC-UCY), was the lead author and editor of the report, with significant assistance from Work Package 5 leader Daniel Hayes (OC-UCY).

Significant contributions were also made by:

- Alberto Alvarez, CMRE
- Lucas Merckelbach, HZG
- Fabrizio D'Ortenzio, UPMC-LOV
- Pierre Cauchy, UPMC-LOCEAN
- Marc Tedetti and Madeleine Goutx, CNRS/MIO

The following are acknowledged for replying to follow-up questions to their responses to GROOM-wide questionnaires, providing feedback and useful anecdotal information:

- Laurent Beguery, CNRS/INSU
- Jan Kaiser, UEA
- Karen Heywood, UEA
- Gerd Krahnemann, GEOMAR
- Johannes Karstensen, GEOMAR
- Joaquín Tintoré, CSIC
- Simón Ruiz, CSIC
- Elena Mauri, OGS
- Peter Haugan, UIB
- Ilker Fer, UIB
- Nadin Ramirez, UDEC
- Lars Stemmann, UPMC-LOV
- Marc Picheral, UPMC-LOV
- Lionel Giudi, UPMC-LOV
- Oscar Schofield, Rutgers State University of New Jersey
- Clayton Jones, Teledyne Webb Research Corp.
- Margo Newcombe, Teledyne RD Instruments
- Jerry Mullison, Teledyne RD Instruments
- Alan Kenny, Teledyne RD Instruments
- Steve Curnew, Imagenex Technology Corp.
- Denise King, VEMCO
- Joel Edelman, SonTek, Xylem
- Alfred Hanson, SubChem Systems

D5.2

I. INTRODUCTION

I.A. Objectives

The marine environment is punctuated by seasonal, inter-annual and inter-decadal variability, underlying anthropogenic effects of change. The spatial and temporal scales of the different phenomena that characterize the marine environment necessitate the use of various platforms and approaches that span these scales (Dickey 2003). The establishment and expansion of the Global Ocean Observing System (GOOS) has significantly contributed to charting the marine environment. In particular, mobile, low-power platforms such as floats and gliders have greatly expanded the space and frequency with which several important parameters are documented throughout the year (Testor et al. 2010).

The cost-efficient nature of autonomous platforms has led to their higher visibility and popularity as oceanographic tools. The FP7-funded project GROOM (Gliders for Research, Ocean Observation and Management, <http://www.groom-fp7.eu>) has been funded to help coordinate the glider infrastructure in Europe, in collaboration with other similar infrastructures elsewhere. The goals of GROOM include, among others, the standardization of the use of current sensors on gliders through calibration, intercomparison, and quality control/quality assessment (QC/QA) protocols, the testing and introduction of new sensors to gliders, and the determination of future needs for glider sensors by the present users.


In this report, we catalogue existing mission-tested sensors, prototypes currently under testing, sensors that are readily adaptable for gliders (typically used on other autonomous platforms), as well as parameters/sensors which may well be developed within 5-10 years. We list sensor characteristics, especially those that impact glider payload, i.e., power requirements, weight, and size (dimensions), relying on published documentation, as well as the surveying of the glider community at-large including users and industry partners. Sensor performance is included in this report only to the extent where payload considerations apply. Quality control/assurance issues, as well as calibration, intercalibration and intercomparison topics are discussed in GROOM deliverable D5.3. Information on desired sensors for biogeochemical and ecological parameters is further elaborated in GROOM deliverable D3.5.

I.B. General overview

The JERICO project (Joint European Research Infrastructure network for Coastal Observatories, <http://www.jerico-fp7.eu>), also funded by FP7, conducted a thorough study of the status of the European glider fleet, and the results were summarized in JERICO deliverable D3.2 (Tintoré et al. 2013). The main points of relevance to this report are summarized as follows:


D5.2

As of May 2013, the European glider fleet consisted of 82 gliders, of which 29 are deep Slocum gliders, 26 are Seagliders, and 21 are coastal Slocum gliders

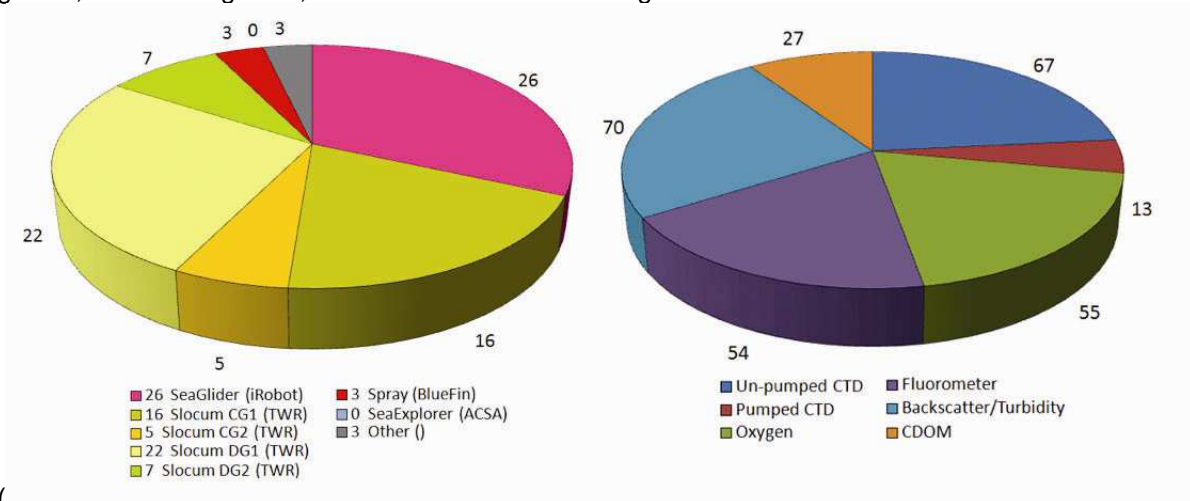

- (a) **Figure 1a).** It is noted that a European institution first purchased a glider in 2004 (it was a Slocum glider);
- (b) As of May 2013, there were plans to add 22 gliders to the European fleet, of which 11 will be Slocum gliders, and 6 will be Seagliders;


Unpumped CTDs outnumber pumped CTDs by 67 to 13

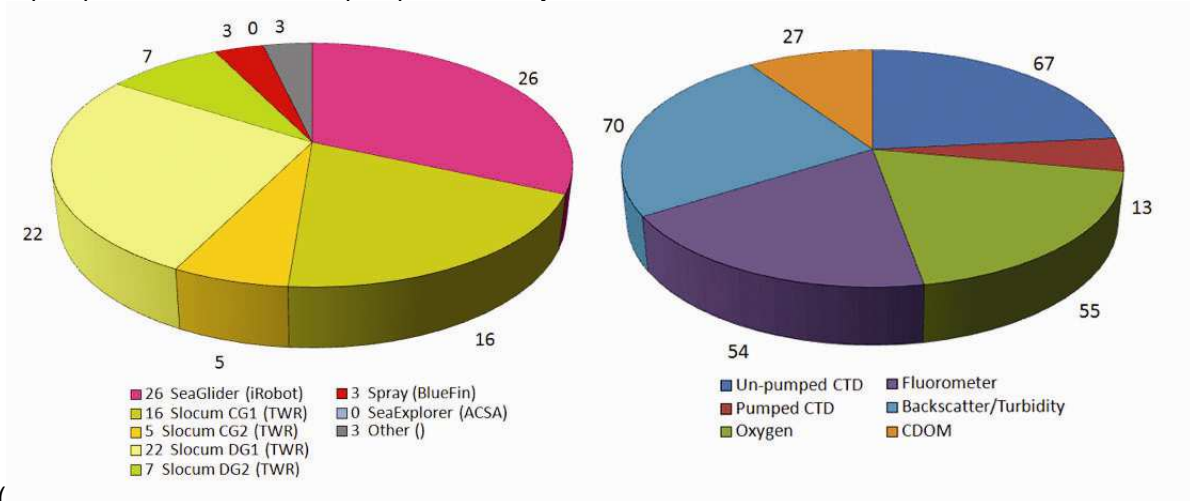

- (c) **Figure 1b),** all of which are made by Sea-Bird (see section II.A);

D5.2

Back-scatter sensors (70) are widely used, mostly due to the incorporation (practically by default) of the WetLabs ECO Puck models onto gliders

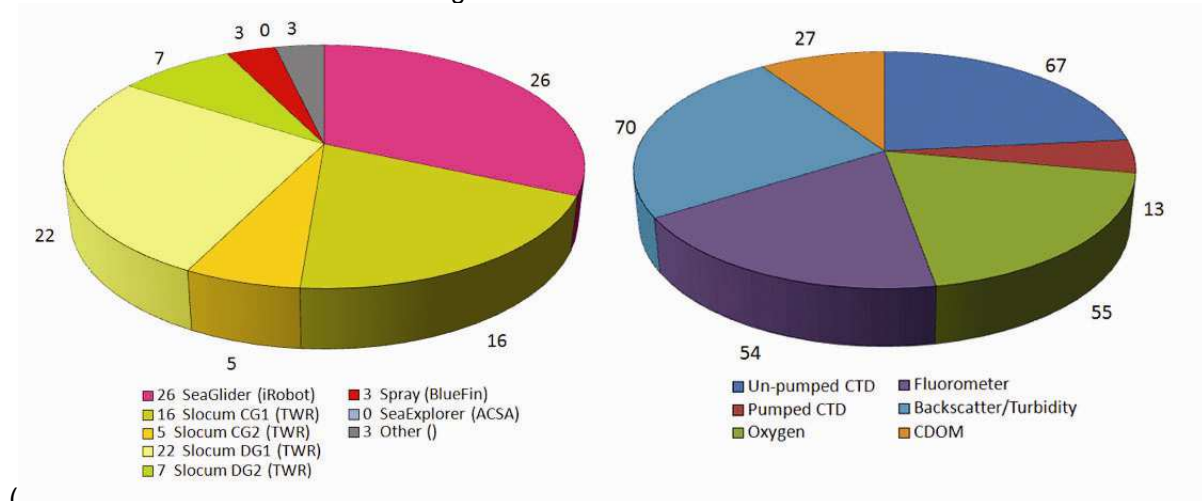

- (d) **Figure 1b).** The other ECO Puck sensors, Chl a fluorometers (54) and CDOM fluorometers (27), are also widely operated (see sections II.C, II.E and II.F);
- (e) A total of 55 oxygen sensors are in operation on gliders, most of which (85 %) are manufactured by AADI/Aanderaa, and the rest made by Sea-Bird (see section II.B);
- (f) Single items of numerous other types of sensors (for irradiance, turbulence/velocity, nitrate, PAR, etc.) are owned by various groups according to their needs and goals. While there are 286 CTDs, back-scatter, fluorometer and oxygen sensors operated on gliders as of May 2013 (mentioned above), there are only 19 "rare" sensors currently in use.

Our report catalogues the specifications of not only the sensors alluded to in JERICO deliverable 3.2, but also other sensors in use on gliders internationally, regardless of their commonality or rarity.

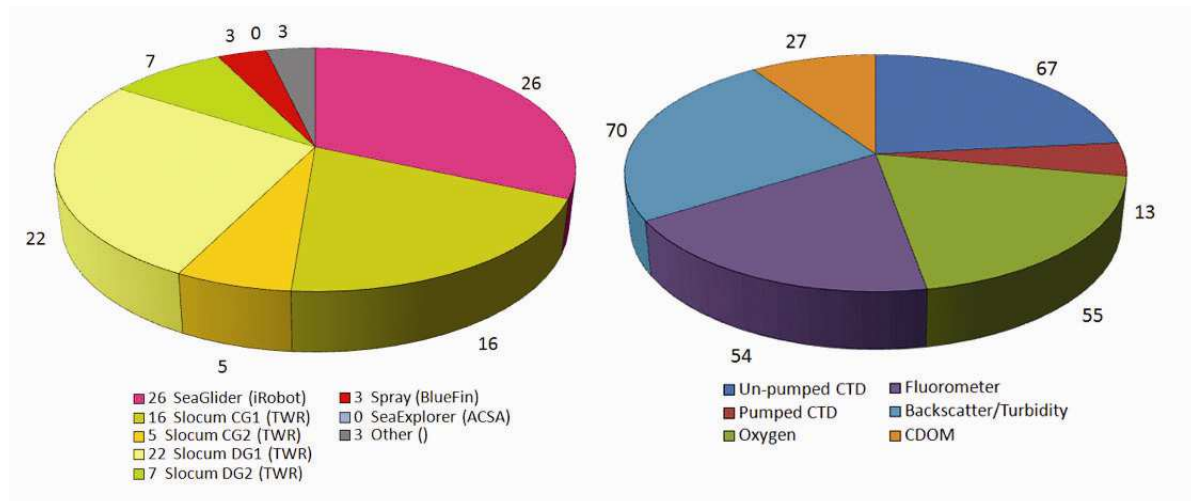


Figure 1: Figures adapted from JERICO deliverable D3.2 (Tintoré et al. 2013): (a) European glider fleet composition by manufacturer and model as of May 2013 (total = 82 gliders); (b) Most common sensors used in the European glider fleet as of May 2013 (total = 286 sensors).

I.C. Sensor readiness

D5.2

For the purposes of this paper, we define a sensor as to include not only a detector but also any related circuitry that may accompany it. We opt for this definition, which by VIM (Vocabulaire International de Métrologie) standards is referred to as a transducer (Waldmann et al. 2010), because the industry typically produces, tests, and markets sensors as such. **Table 1** lists all sensors discussed in this report.

We group the parameters for which glider sensors have been used to readiness or development levels, based on two intuitive classification schemes: (a) The Technology Readiness Levels (TRL), as these were adapted by Waldmann et al. (2010) for Ocean Sciences sensors (OS-TRL), and (b) development status, as defined by Johnson et al. (2000) during the OCTET study (**Table 2**). Typically, sensors that are listed in glider industry literature as “accommodated”, “previously integrated”, and available, are classified at OS-TRL 4 (9. Mission proved) or status I (Bluefin Robotics 2010, iRobot 2012, Teledyne Webb Research 2010). Unique prototypes that have been experimentally deployed are classified at OS-TRL 2-3 (Research prototype or system prototype deployment in a suitable environment) or status II-III. Sensors which have been successfully deployed on other autonomous platforms and consequently are deemed readily adaptable for low power applications, such as on gliders, are classified as OS-TRL 2 (4. Validation in a laboratory environment) and status IV (Bench-top prototype in operation). Information on sensors at other stages of development was obtained from publicly available documents as well as from personal communications with the glider user community, including users and industry partners (**Table 1**).

D5.2

Table 1 Overview of sensors developed and/or under development for glider usage.

Parameter(s)	Sensor type	Manufacturer	Model(s)	Glider type(s)	Representative sources
Developed, mission-proved, commercially available sensors for gliders					
Pressure, Conductivity, Temperature	CTD	Sea-Bird Electronics	CT-Sail, GPCTD, Slocum GPCTD	Slocum, Seaglider	Sea-Bird (2007, 2010, 2012a, b), Eriksen et al. (2001)
		WHOI	Fin-cell GCTD	Slocum	Schmitt and Petitt (2006)
Oxygen (O ₂)	DO optode	Aanderaa (AADI)	3880, 4831F	Slocum, Seaglider	AADI (2012a)
	DO sensor	Sea-Bird Electronics	SBE-43F	Seaglider	Sea-Bird (2012c)
	DO sensor	JFE ALEC Co. Ltd (RINKO)	RINKO III Fast DO	Slocum	JFE ALEC Co. (2010)
Chl a fluorescence	ECO Puck	WETLabs	FL designation	Slocum, Seaglider	WETLabs (2009a)
	Fluorometer	Seapoint Sensors	Chl. fluorometer	Spray	Seapoint Sensors (2013a)
Phycobilins (phycocyanin, phycoerythrin)	ECO Puck	WETLabs	FL designation	Slocum, Seaglider	WETLabs (2011a)
Turbidity backscatter	ECO Puck	WETLabs	BB designation	Slocum, Seaglider	WETLabs (2009a, 2011a)
	Beam Attenuation meter	WETLabs	BAM	Slocum	WETLabs (2009b)
	Turbidity meter	Seapoint Sensors	Turbidity meter	Spray	Seapoint Sensors Inc. (2013b)
Chromophoric Dissolved Organic Matter (CDOM) fluorescence	ECO Puck	WETLabs	FL designation	Slocum, Seaglider	WETLabs (2009a, 2011a)
Current	ADCP	Nortek	AD2CP	Seaglider, Spray	Siegel and Rusello (2013)
	ADCP	Nortek	Aquadopp	Slocum, Spray	Nortek (2013)

D5.2

	DVL	Teledyne RDI	Explorer DVL	Slocum	Teledyne RD Instruments (2011)
	ADCP	Teledyne RDI	Explorer ADCP	Slocum	Teledyne RD Instruments (2013)
Radiance, irradiance and PAR	Irradiance sensor	Satlantic	AUV Micro 4 channel	Slocum	Satlantic (2013a)
	Radiance sensor	Satlantic	AUV Micro 4 channel	Slocum	Satlantic (2013a)
	PAR sensor	Biospherical Instruments	QSP-2000 series	Seaglider	Biospherical Instruments (2011)
	PAR sensor	Satlantic	Log AUV PAR sensor	Slocum	Satlantic (2012)
Animal biomass and presence	Echosounder	Imagenex	853 (120 kHz)	Seaglider, Slocum	Imagenex (2013)
	Transceiver	VEMCO	VMT	Slocum	Oliver et al. (2013)
	ADP	SonTek	760 kHz	Slocum	Davis et al. (2008)
Marine mammal detection	Hydrophone	High Tech Inc.	HTI-99-HF	Seaglider	Klinck et al. (2012)
	Hydrophone	WHOI	DMON	Seaglider, Slocum	Hurst et al. (2012)
Turbulence	Turbulence profiler	Rockland Scientific	MicroRider-1000	Slocum	Rockland Scientific (2013a)
	ADCP	Nortek	Aquadopp HR ADCP	Spray	Rusello et al. (2011)
Wind	Acoustic recorder	Greeneridge Sciences Inc.	Acousonde	Slocum, Seaglider	Greeneridge Sciences Inc. (2012)
Nitrate (NO ₃ ⁻)	Nitrate sensor	Satlantic	SUNA v2	Slocum	Satlantic (2013b)
<i>Prototypes and sensors in development for gliders</i>					
Radioactivity	NaI Scintillation Probe	Amptek	Gamma-Rad	Slocum	Jones et al. (2011)

D5.2

Video imagery	Digital camera	-	-	Slocum	Glenn and Schofield (2009)
Multiple optical properties	Optical sensors	Turner	Cyclops	Slocum	Jones et al. (2011)
<i>Readily adaptable sensors for glider use</i>					
Nutrients	Microfluidics analyzers	SubChem Systems	APNA	-	SubChem (2011a)
			ChemFIN™	-	SubChem (2011b)
			MarChem	-	SubChem (2009)
Nitrate	UV sensor	NOC/Valeport Ltd.	SUV-6	-	Pidcock et al. (2010)
Unexploded ordnance	Ordinance immunosensor	US NRL/SubChem	-	-	Adams et al. (2011, 2013), Charles et al. (2011)
Harmful algal bloom (HAB) toxins	Microfluidics analyzer	SubChem	MarChem		Hanson and Kusterbeck (2010, 2011)
Methane (CH ₄)	IR spectrometer	CONTROS	HydroC™ CH ₄	-	CONTROS (2011a)
Carbon dioxide (pCO ₂)	IR spectrometer	CONTROS	HydroC™ CO ₂	-	CONTROS (2011b)
Hydrocarbons	Fluorometer	CONTROS	HydroC™ PAH	-	CONTROS (2011c)
	ECO Puck	WETLabs	FL designation	Slocum, Seaglider	WETLabs (2013)
	Fluorometer	TriOS Optical Sensors	EnviroFlu-HC	-	Tedetti et al. (2010), TriOS Optical Sensors (2013)
	Fluorometer	CNRS/MIO	MiniFluo-UV	SeaExplorer, Slocum	Tedetti and Goutx (2012), Tedetti et al. (2013)
Bioluminescence	Luminometer	WETLabs	UBAT	-	WETLabs (2010)

D5.2

Table 2: Ocean Sciences Technology Readiness Levels (OS-TRL), as defined by Waldmann et al. (2010), matched by development status as described by Johnson et al. (2000). The nine TRL definitions originate from NASA (Mankins 1995). Parameters covered by existing glider sensors, as identified by this review (Table 1), are categorized in the last column.

TRL	TRL description (Waldmann et al. 2010)	Status of development (Johnson et al. 2000)	Glider sensor parameters
OS-TRL 1: Proof-of-concept/development			
1	Basic principles observed and reported		
2	Technology concept and/or application formulated		
3	Analytical and experimental critical function and/or characteristic proof-of concept		
OS-TRL 2: Research prototyping			
4	Component and/or breadboard validation in laboratory environment	IV Bench-top prototype in operation	Nutrients, NO ₃ ⁻ , Unexploded ordinance, HAB toxins, pCO ₂ , CH ₄ , Hydrocarbons, Bioluminescence
5	Component and/or breadboard validation in relevant environment	III Early stage of development with successful short-term deployments in the marine environment	Radioactivity, Video imagery
6	System/subsystem model or prototype demonstration in a relevant environment		
OS-TRL 3: Commercial product			
7	System prototype demonstration in a space/ocean environment		
8	Actual systems completed and "mission qualified" through test and demonstration	II Successfully deployed in the marine environment for extended periods (>1 month) with oceanographically consistent results but not commercially available	
OS-TRL 4: Mission proved			
9	Actual system proven through successful mission operations	I Currently operational and available commercially	Pressure, Conductivity, Temperature, O ₂ , Chl a fluorescence, Phycobilins, Turbidity backscatter, CDOM fluorescence, Current, Radiance, Irradiance, Animal biomass, Marine mammals, Turbulence, Wind, NO ₃ ⁻

II. MISSION-PROVED, COMMERCIALY AVAILABLE SENSORS FOR GLIDERS

II.A. Pressure, conductivity and temperature

II.A.1. Sea-Bird Glider Payload CTDs

The predominant CTD sensors used on gliders in Europe are the Sea-Bird CTDs, previously the CT Sail and more recently the Seaglider and Slocum GPCTDs (**Figure 2**). Their specifications are listed in **Table 3** (pressure), **Table 4** (conductivity), and **Table 5** (temperature).

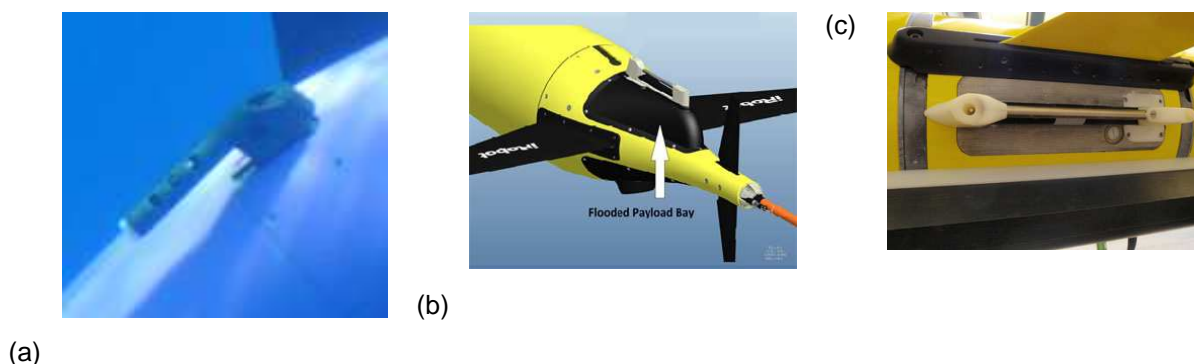


Figure 2 (a) Sea-Bird CT Sail CTD on a Seaglider (courtesy Angelos Hannides), (b) Sea-Bird Glider Payload CTD for Seagliders (Janzen and Creed 2011) (c) Sea-Bird Slocum Glider Payload CTD mounted on a Slocum glider (courtesy Lucas Merckelbach).

Based on the questionnaire findings reported in JERICO deliverable D3.2 (Tintoré et al. 2013), it is evident that 5 in 6 CTDs used on gliders in the European fleet are the original flow-through or unpumped CTDs. This design ensures lower power consumption by removing the need to pump water through the measurement system, but simultaneously introduces an uncertainty as to the intensity and stability of the flow rate. The unknown and variable flow rate, which depends on the flight dynamics of the glider (speed and angle of attack), hampers a reliable correction for the thermal lag error (Garau et al. 2011).

In contrast, the newer design for glider payload CTDs uses a low power pumping system, which, at the expense of perhaps a small power consumption increase, generates a steady flush rate through the conductivity cell approximately equal to 10 mL s^{-1} (Janzen 2011). The high and steady flow rate improves the performance of thermal lag correction methods, and also reduces the magnitude of the thermal lag error.

II.A.2. Fin-cell GCTD

Schmitt and Petitt (2006) developed a fast-response four-electrode CTD, dubbed the fin-cell GCTD (**Erreur ! Source du renvoi introuvable.**), designed to be free flushing, with low drag, low thermal mass, and low fouling potential. The GCTD sampled more frequently and precisely than a Sea-Bird CTD during testing on a Slocum glider. It is powered at 12 VDC ($\pm 10\%$) and draws 35 mA. The electronics board ($15.36 \text{ cm} \times 4.74 \text{ cm} \times 1.92 \text{ cm}$) is mounted to the internal chassis of the glider, and is connected to the external CT sensor. More information is provided in **Table 4** (conductivity) and **Table 5** (temperature).



Figure 3: (above right) The fin-cell GCTD mounted onto a Slocum glider (Schmitt and Petitt 2006)

D5.2

Table 3 Specifications for pressure sensors for gliders.

Manufacturer and model	Sea-Bird CT Sail (Paine 211-75-710-05)	Sea-Bird Glider Payload CTD (GPCTD)	Sea-Bird Slocum Glider Payload CTD
Glider platform	Seaglider, Slocum	Seaglider	Slocum
Weight (kg)	Air: 0.18	350 m version: Air: 1.0, Water: 0.2 1500 m version: Air: 1.2, Water: 0.4	Air: 2.0, Water: 0.4
Dimensions (cm)		25.6 × 11.6 × 6.2	
Power supply (VDC)		8-20	8-20
Current (mA)		30	
Wattage (mW)		175-190 (continuous)	241 (continuous)
Depth rating (m)	3000	350, 1500	
Range (dbar)	0-1500	0-100, 0-350 0-1000, 0-2000	0-100, 0-350 0-1000, 0-2000
Accuracy (%)	± 0.25% (full Scale)	± 0.1	± 0.1
Resolution (%)		± 0.002	± 0.002
Stability (% y⁻¹)		0.05	
Reference	Eriksen et al. (2001)	Sea-Bird (2012a)	Sea-Bird (2010)

D5.2

Table 4 Specifications of conductivity sensors for gliders.

Manufacturer and model	Sea-Bird CT Sail SBE 4	Sea-Bird Glider Payload CTD		Sea-Bird Slocum Glider Payload CTD		Fin-cell GCTD
Glider platform	Seaglider, Slocum	Seaglider		Slocum		Slocum
Weight (kg)	Air: 0.7, Water: 0.34	350 m version: Air: 1.0, Water: 0.2 1500 m version: Air: 1.2, Water: 0.4		Air: 2.0, Water: 0.4		Air: 0.225 (without internally mounted board)
Dimensions (cm)	25×7.7×4.8	25.6×11.6×6.2				
Power supply (VDC)	6-24	8-20		8-20		12 (± 10 %)
Current (mA)	18	30				35
Wattage (mW)		175-190 (continuous)		241 (continuous)		
Depth rating (m)	3400	350	1500	350	1500	
Range ($S m^{-1}$)	0-7	0-9	0-9	0-9	0-9	0-6
Accuracy ($S m^{-1}$)	± 0.0003	± 0.0003	± 0.003	± 0.0003	± 0.003	± 0.001
Resolution ($S m^{-1}$)	± 0.0003	± 0.00001	± 0.0001	± 0.00001	± 0.0001	± 0.00001
Stability ($S m^{-1} mo^{-1}$)	± 0.00004	0.0003	0.003	-	-	-
Reference	Sea-Bird (2012b)	Sea-Bird (2012a)		Sea-Bird (2010)		NBOSI (2013)

D5.2

Table 5: Specifications of temperature sensors for gliders.

Manufacturer and model	Sea-Bird CT Sail SBE 3plus	Sea-Bird Glider Payload CTD	Sea-Bird Slocum Glider Payload CTD	Fin-cell GCTD
Glider platform	Seaglider, Slocum	Seaglider	Slocum	Slocum
Weight (kg)	Air: 0.63, Water: 0.28	350 m version: Air: 1.0, Water: 0.2 1500 m version: Air: 1.2, Water: 0.4	Air: 2.0, Water: 0.4	Air: 0.225 (without internally mounted board)
Dimensions (cm)	3.6 (∅) × 27	25.6 × 11.6 × 6.2		
Power supply (VDC)	11-16	8-20	8-20	12 (± 10 %)
Current (mA)	25	30		35
Wattage (mW)		175-190 (continuous)	241 (continuous)	
Depth rating (m)	6800	350, 1500		
Range (°C)	-5 - 35	-5 - 42	-5 - 42	0-30
Accuracy (°C)	± 0.001	± 0.0002	± 0.0002	± 0.005
Resolution (°C)	± 0.0003	± 0.001	± 0.001	± 0.0001
Stability (°C mo⁻¹)	< 0.00017	0.0002	-	
Reference	Sea-Bird (2007)	Sea-Bird (2012a)	Sea-Bird (2010)	NBOSI (2013)

D5.2

II.B. Dissolved Oxygen (DO)

There are two predominant sensors for the detection of DO on gliders in the European fleet. According to the JERICO survey (JERICO Deliverable 3.2; Tintoré et al. 2013), the vast majority (85 %) of DO instruments are Aanderaa DO optodes, and the remainder are Sea-Bird's DO sensors. A third sensor, the RINKO III Fast DO sensor, is listed in the Slocum G2 Glider product catalogue (Teledyne Webb Research 2013) for incorporation into the Slocum payload bay. Specifications of all three sensors are shown in **Table 6**.

II.B.1. Aanderaa DO optode (3880, 4831F)

The most popular DO sensor on European fleet gliders is the AADI/Aanderaa DO optode. Two major models are in operation, the older 3880 and the more recent 4831F (AADI 2012a, b). The DO optodes operate on the lifetime-based luminescence quenching principle. Specifically, a platinum-porphyrin complex embedded in a gas-permeable foil that is in contact with the surrounding seawater, is excited by blue light emitted by an LED source and emits red light, which is detected by a sensor (Tengberg et al. 2003). The complex reacts with oxygen present in the seawater, and consequently the emitted light is quenched in proportion to the oxygen concentration. In lifetime quenching, the optode measures the time it takes (lifetime) for the light returning to the instrument to disappear. The superiority of DO optodes over Clark-type sensors is mainly due to the sensitivity of the latter to various measurement conditions, including flow rates (see below).

II.B.2. Sea-Bird DO sensor (SBE-43F)

The Sea-Bird SBE-43F DO sensor (Sea-Bird 2012c) is a polarographic membrane Clark-type sensor (Clark Jr. et al. 1953). A gold cathode and a silver anode are immersed in an ionic solution which is separated from surrounding seawater by a gas-permeable membrane. The current which flows between the polarized cathode and the non-polarized anode is proportional to the DO in the ionic solution, which is equilibrated with surrounding seawater with respect to DO.

One concern with polarographic (Clark-type) sensors is that DO is actually consumed during detection and consequently its signal is negatively affected by reduced flow rates and consequently slower equilibration. Since the Sea-Bird DO sensor is commonly connected to an unpumped CTD (based on the user surveys conducted for JERICO and GROOM), the resulting signal may often be an underestimation of the actual concentration.

II.B.3. RINKO III Fast DO sensor

A third sensor, listed in the Slocum G2 Glider product catalogue (Teledyne Webb Research 2013) is a polarographic fast DO sensor manufactured by JFE ALEC and distributed by Rockland SI (JFE ALEC Co. 2010). There is no information on the extent of use of this DO sensor.

D5.2

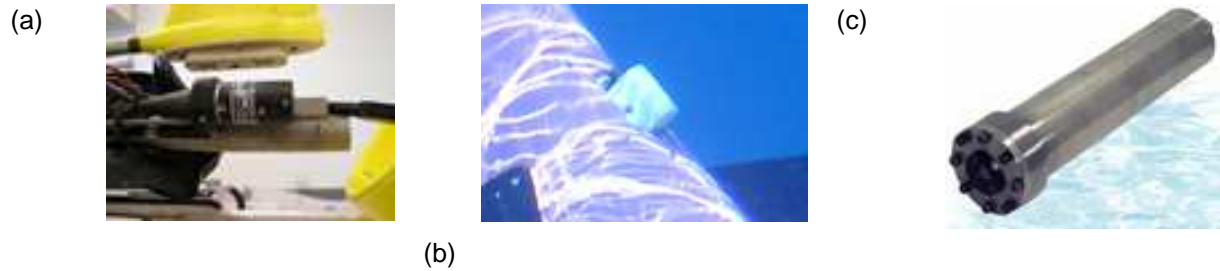


Figure 4: DO sensors used on gliders: (a) Exposed Aanderaa DO optode on a coastal Slocum glider (NCCOOS 2012), (b) Inflow and outflow of a Sea-Bird 43F DO sensor on a Seaglider (courtesy Angelos Hannides), (c) The RINKO III DO sensor for Slocum gliders (JFE ALEC Co. 2010).

D5.2

Table 6: Specifications of dissolved oxygen sensors used on gliders.

Manufacturer and model	Aanderaa optode 3880, 4831F	Seabird SBE-43F	JFE ALEC RINKO III Fast DO sensor
Glider platform	Slocum, Seaglider	Seaglider	Slocum
Weight in water (kg)	0.21	0.1 (plastic), 0.2 (Ti)	0.9
Dimensions (cm)	3.6 (Ø) × 8.6	3.9 (Ø) × 14.2	
Depth rating (m)	≤ 6000	600 (plastic), 7000 (Titanium)	7000
Range ($\mu\text{mol L}^{-1}$, %)	0-500, 0-120	-, 0-120	0-20 mg/L, 0-200
Accuracy ($\mu\text{mol L}^{-1}$, %)	8, 5	-, 2	-, 2
Resolution ($\mu\text{mol L}^{-1}$, %)	1, 0.4		0.01 to 0.4% (2 to 8 $\mu\text{g/L}$)
Stability (% y^{-1})			1% (24 hours), 5% (1 month)
Response time			0.4 sec (63%), 0.9 sec (90%)
Current	80 mA s^{-1} (recording interval)		110 mA (during measurement)
Wattage (W)		0.045	
Reference	AADI (2012a)	Sea-Bird (2012c)	JFE ALEC Co. (2010)

D5.2

II.C. Chlorophyll *a* fluorescence

The predominant sensor used to detect Chlorophyll *a* (Chl *a*) fluorescence by gliders is the WETLabs ECO Puck (WETLabs 2009a), which comes under different parameter configurations. The inclusion of a Chl *a* fluorescence module is designated with the letters FL in the ECO Puck and Triplet model names.

Questionnaire responses indicated that, even though Chl *a* fluorescence is routinely collected by gliders in the European fleet, the resulting data remains underused due to the questions surrounding the relationship between Chl *a* concentration and fluorescence, as this is measured using a multitude of sensors on various platforms (e.g., ship-deployed packages, moored buoys, floats, AUVs, gliders, etc.). Chl *a* fluorescence is commonly defined as the intensity of radiation at 695 nm, or emission wavelength (this value may be different, but always in the range of 650-700 nm) that is detected after the sample has been irradiated at 470 nm, or excitation wavelength (Earp et al. 2011). This intensity is thought to be proportional to the amount of Chl *a* present in the sample, but the actual relationship is affected by numerous parameters (e.g., nutritional status, species composition, recent light history, etc.) that introduce variability of up to an order of magnitude (Holm-Hansen et al. 2000, Jolliff et al. 2012). Therefore, significant effort is invested in comparing sensor Chl *a* fluorescence readings with Chl *a* concentrations from bottle samples (e.g., Bagniewski et al. 2011, D'Asaro 2009) or with satellite observations (Lavigne et al. 2012, Mignot et al. 2011).

II.C.1. WETLabs ECO Puck (models including FL designation)

As previously mentioned, the WETLabs ECO Puck (**Figure 5a**) and Triplet (**Figure 6a**) sensors can be purchased in various configurations that may include a Chl *a* module, and in that case the model name includes the designation FL. In the case of the ECO Pucks, the excitation and emission wavelengths are 470 nm and 695 nm, respectively. Specifications for the ECO Puck are shown in **Table 7**.

II.C.2. Seapoint Chlorophyll Fluorometer

Seapoint has produced a Chlorophyll fluorometer (Seapoint Sensors Inc. 2013a), which has been repeatedly deployed by one group on Spray gliders (Davis et al. 2008, Todd et al. 2011). Excitation and emission wavelengths are 470 nm and 685 nm, respectively. Specifications for the Seapoint Chlorophyll fluorometer (**Figure 5b**) are shown in **Table 7**.

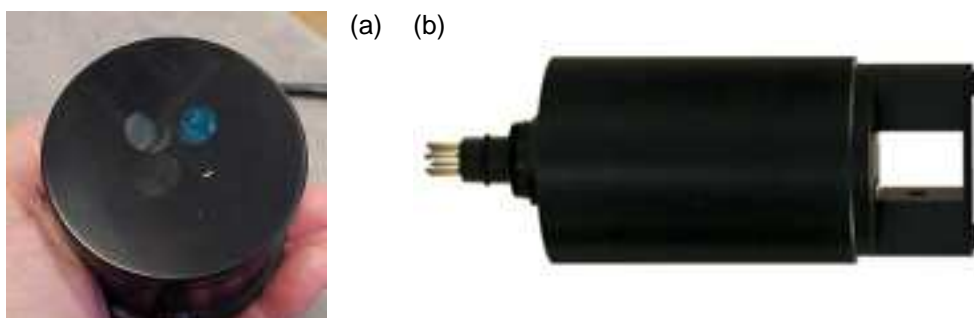


Figure 5: Chlorophyll *a* sensors used on gliders: (a) The WETLabs ECO Puck (WETLabs 2009a), (b) the Seapoint Chlorophyll fluorometer (Seapoint Sensors Inc. 2013a)

D5.2

Table 7: Specifications of chlorophyll a fluorescence sensors used on gliders.

Manufacturer and model	Wetlabs ECO Puck (models including FL)	Seapoint Chlorophyll Fluorometer
Glider platform	Slocum, Seaglider	Spray
Weight (kg)	Air: 0.28/0.4* Water: 0.02	Air: 0.85
Dimensions (cm)	6.3 (Ø) × 5/12.7*	6.4 (Ø) × 16.8
Excitation/Emission λ (nm)	470/695	470/685
Range (counts)	4200	
Resolution (counts)	1-2	
Voltage (VDC)	7-15	8-20
Current (mA)	80/60*	15 (aver.), 27 (peak)
Reference	WETLabs (2009a)	Seapoint Sensors Inc. (2013a)

* ECO Triplet

II.D. Phycobilins (phycocyanin, phycoerythrin)

II.D.1. WETLabs ECO Puck (models including FL designation)

The WETLabs ECO Puck (**Figure 5a**) and Triplet (**Figure 6a**) sensors can be customized to optically detect phycocyanin and phycoerythrin (WETLabs 2011b). These two phycobilins act as light-harvesting antennae for photosystem II, which only occurs in cyanobacteria, therefore they are considered reliable proxies for cyanobacterial abundances (Poryvkina et al. 1994). Excitation and emission wavelengths are 630/680 nm and 540/570 nm for phycocyanin and phycoerythrin, respectively, with a sensitivity of 0.09 ppb over a range of 0–175 ppb (WETLabs 2011a). Design and payload specifications for the ECO Puck and Triplet are listed in **Table 7**.

D5.2

II.E. Turbidity backscatter

The degree of light scattering at various wavelengths in the visible spectrum is considered to be a reliable proxy of particle concentrations, even though absolute correlation between scattering and concentration may require extensive inter-comparison (e.g., Glenn et al. 2008). Below, we list the optical sensors that have been used to measure this proxy.

It should be noted that, in principle, scattering could be representative of not just sediment grains, but also plankton and detritus. As for sediment, such applications for backscatter remain to be explored through inter-comparison. Apart from the effect of particles on optical properties, acoustic sensors such as ADPs can be also be used (e.g., Davis et al. 2008), even though acoustics are more commonly used for the detection of animals, both plankton and nekton (see Section II.I).

II.E.1. WETLabs ECO Puck (models including BB designation)

The WETLabs ECO Puck (Figure 5a) and Triplet (**Figure 6a**) sensors can be selected to measure scattering at four different wavelengths: 470, 532, 650, and 700 nm. The relevant specifications are shown in **Table 8**.

II.E.2. WETLabs Beam Attenuation Meter

According to the product catalogue (Teledyne Webb Research 2013), the Slocum glider can be configured to accommodate a WETLabs Beam Attenuation Meter (**Figure 6b**), originally configured for AUVs (WETLabs 2009b). The BAM can be configured to measure at 470, 532, or 650 nm. Other specifications for this sensor are shown in **Table 8**.

II.E.3. Seapoint Turbidity Meter

Seapoint has produced a turbidity meter (Seapoint Sensors Inc. 2013b), that is reportedly being used on a Spray glider owned and operated by PLOCAN (2013). The source wavelength is 880 nm and the sensing distance is < 5 cm. Specifications for the Seapoint Turbidity Meter (**Figure 6c**) are shown in **Table 8**.

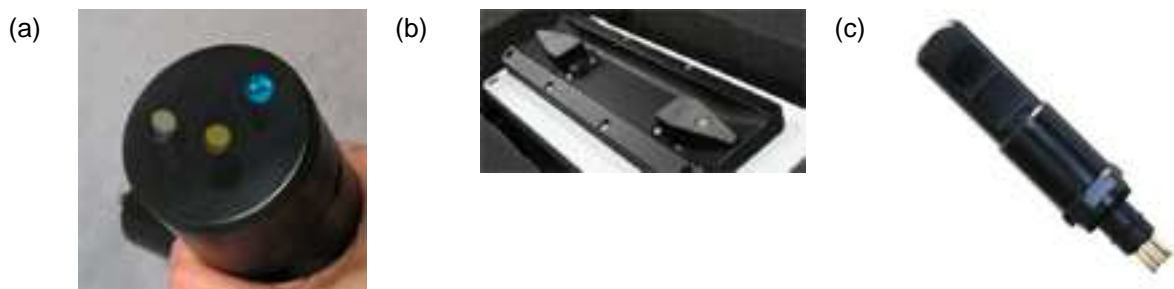


Figure 6: Turbidity backscatter sensors used on gliders: (a) the WETLabs ECO Triplet (WETLabs 2011a), (b) the WETLabs Beam Attenuation Meter, mounted in a Slocum glider (Teledyne Webb Research 2013), (c) the Seapoint Turbidity Meter (Seapoint Sensors Inc. 2013b).



GROOM Sensors for gliders
Grant Agreement Number: 284321
FP7-Infra-2011-2.1.1 "Design Studies"



D5.2

D5.2

Table 8: Specifications for optical turbidity back-scatter sensors.

Manufacturer and model	WETLabs ECO Puck	WETLabs BAM	Seapoint Turbidity Meter
Glider platform	Slocum, Seaglider	Slocum	Only reported on Spray
Weight (kg)	Air: 0.28/0.4* Water: 0.02	Air: 3.28 Water: 2.06	Air: 0.086
Dimensions (cm)	6.3 (∅) × 5/12.7*	19.56 × 12.45 × 6.35	2.5 (∅) × 12
Materials	Acetal copolymer		ABS plastic, epoxy
Depth rating (m)	600	1000	6000
Power requirements (VDC)	7-15	7.5-15	7-20 VDC
Current (mA)	80/60*	35	3.5 (aver), 6 (peak)
Source λ (nm)	470, 532, 650, 700	470, 532, 650	880
Range	0-5 m ⁻¹		25, 125, 500 counts
Resolution		0.003 m ⁻¹	< 2 %
Sensitivity	0.003 m ⁻¹		
Sensing distance (cm)	1-2	Path length: 10 cm	< 5
Reference	WETLabs (2009a, 2011a)	WETLabs (2009b)	Seapoint Sensors Inc. (2013b)

* ECO Triplet

II.F. Chromophoric dissolved organic matter (CDOM) fluorescence

The optical properties of chromophoric dissolved organic matter (CDOM) in seawater have been studied for more than 80 years, and work to better correlate these properties with the chemical composition of CDOM is ongoing (Nelson and Siegel 2002). The optical property that is relevant to CDOM sensors such as those used on gliders is that CDOM fluoresces blue when irradiated with UV light. Because seawater is characterized by fairly featureless excitation and emission spectra, excitation wavelengths of 300-360 nm and emission wavelengths of 400-500 nm can be representative of the whole spectrum (Chen and Bada 1992). Therefore, an excitation-emission pair can be used to measure CDOM fluorescence.

II.F.1. WETLabs ECO Puck (models including FL designation)

The WETLabs ECO Puck (*Figure 5a*) and Triplet (*Figure 6a*) sensors can be selected to measure CDOM fluorescence at excitation and emission wavelengths of 370 nm and 460 nm, respectively. The relevant specifications are shown in **Table 9**.

Table 9: Specifications of the WETLabs ECO Puck sensor used for CDOM fluorescence measurements on gliders.

Manufacturer and model	WETLabs ECO Puck
Glider platform	Slocum, Seaglider
Weight (kg)	Air: 0.28/0.4* Water: 0.02
Dimensions (cm)	6.3 (∅) × 5/12.7*
Materials	Acetal copolymer
Depth rating (m)	600
Power requirements (VDC)	7-15
Current (mA)	80/60*
Excitation/Emission λ (nm)	370/460
Range	0-375 ppb
Sensitivity	0.28 ppb
Sensing distance (cm)	1-2
Reference	WETLabs (2009a, 2011a)

* ECO Triplet

D5.2

II.G. Current

Velocity observations by gliders are mostly derived by dead-reckoning between profiles. The position of the glider upon surfacing from GPS fixes is compared to the expected position based on dead reckoning calculations from a hydrodynamic model of vehicle speed (Eriksen et al. 2001). The difference between the positions in time and space is assumed to be due to an average velocity of the water during the vehicle dive. It should be noted that other navigation errors can contaminate these calculations, such as an improperly calibrated or poorly functioning compass (Merckelbach et al. 2008), or a poorly-configured hydrodynamic model for the vehicle velocity. These depth-average velocities are essential to the control of gliders, as well as being valuable data. If the depth-average velocities can be considered as reliable currents, then they can be used to provide an absolute reference to the geostrophic current shear calculated from adjacent density profiles. Because this calculation only provides the component of current perpendicular to the line connecting the stations, only this component can be referenced. In effect, this allows the verification of the 'level of no motion' assumption typically made.

To achieve absolute current profiles with this method, it is important to plan a glider mission to cross currents in a transverse fashion, since the along-track component of the depth-average velocity cannot be supplemented by density-based geostrophic shear calculations. The ongoing deployment of Acoustic Doppler Current Profilers (ADCPs) on gliders will provide direct observations of depth-dependent velocity profiles, making possible the calculation of fluxes of other observed parameters, such as heat, salinity, nutrients, etc. However, other technical problems appear with ADCP use. In particular, unless bottom-tracking is available, there is no simple, proven method to reference the currents relative to the glider, as measured by the ADCP.

II.G.1. Nortek AD2CP

In 2012, Nortek AS (Oslo, Norway) released the AD2CP-Glider. Nortek AD2CP have now been successfully deployed on Seagliders and Sprays (Rusello 2012, Siegel and Rusello 2013). Technical specifications are listed in **Table** . ADCPs are self-contained physically, and only require power supply and a control connection.

II.G.2. Nortek Aquadopp

The Nortek Aquadopp profiler is a well-established acoustic Doppler current profiler for use on multiple platforms (Nortek 2013). It has been deployed on a Slocum glider (**Figure 7b**) by Woods and Fratantoni (2011) in the Great South Channel, North Atlantic, with considerable success. The specifications of the Nortek Aquadopp are listed in **Table** .

II.G.3. Teledyne RDI Explorer Doppler Velocity Log (DVL)

The Explorer Doppler Velocity Log (DVL) by Teledyne RDI (Teledyne RD Instruments 2011) has been deployed successfully on a Slocum glider (Jones et al. 2011).



Figure 7: (a) A Nortek AD2CP integrated on a Seaglider (Nortek 2011), (b) A Nortek Aquadopp on a Slocum glider (Rusello 2012), (c) A Teledyne RD Instruments Explorer DVL mounted on a Slocum glider (Jones et al. 2011).

D5.2

II.G.4. Teledyne RDI 600 kHz Explorer ADCP

In March 2012, Teledyne RD Instruments (RDI) announced that engineering and field work is underway to test a fully integrated ADCP with bottom tracking capability that will be used to collect high resolution current profiling data from a glider platform (Teledyne RD Instruments 2012). This year, Teledyne RDI announced that a 600 kHz Explorer ADCP has now been successfully mounted and operated on Slocum gliders (Teledyne RD Instruments 2013; Margo Newcombe, personal communication). According to Jerry Mullison (personal communication), Teledyne RDI has established the accuracy of the bottom track solution for an Explorer ADCP mounted to a Slocum glider when oriented for level flight or for descent (the results will be presented at Oceans 2013 in San Diego in September 2013). Moreover, work is continuing on Lowered ADCP techniques with results expected within 2013, while noting independent efforts in the research community on the same front (Ordonez 2012). At this point, Teledyne RDI has delivered 20 of 24 units to be integrated to Slocum gliders destined for the Ocean Observatories Initiative (Alan Kenny, personal communication).

D5.2

Table 9: Acoustic Doppler current profilers (ADCPs) used as current meters on gliders.

Manufacturer and model	Nortek AD2CP	Nortek Aquadopp	Teledyne RDI Explorer DVL
Glider platform	Seaglider, Spray	Slocum	Slocum
Weight (kg)	Water: 0.9	Air: 2.2, Water: 0.2 (1 MHz)	Air: 4.3, Water: 0.8
Dimensions (cm)	13.5 (Ø) × 12.2	8.2 (Ø) × 57.3 (1 MHz)	12.5 (Ø) × 32.9
Depth rating (m)	1000	Varies	1000
Materials	Titanium	Titanium, Delrin	
Power requirements (VDC)	18-26	9-15	12-24
Current (A)		3 (peak)	
Wattage (W)	0.2-0.9	0.2-1.5 (max), 3×10^{-7} (quiesc.-RS232)	12 (peak), 2 (aver.), 1.1 (quiesc.)
Acoustic frequency (MHz)	1	1	0.6144
Max profiling Range (m)	30	20	35
Cell Size (m)	1 (typical)	0.3-4.0	
Maximum Sampling (Hz)	1	1	12
Reference	Siegel and Rusello (2013)	Nortek (2013)	Teledyne RD Instruments (2011)

D5.2

II.H. Radiance, irradiance and PAR

Light penetration into the surface ocean drives many critical processes, most importantly heating, photosynthesis, and animal behavior. Sensors have been developed to measure various parameters related to light penetration: (a) irradiance, defined as power per unit area (e.g., $W m^{-2}$), (b) radiance, defined as power per solid angle per unit area (e.g., $W sr^{-1} m^{-2}$), and (c) Photosynthetically Active Radiation (PAR), defined as the number of photons per unit area per unit time ($\mu mol m^{-2} s^{-1}$). While radiance/irradiance sensors are used in physiological studies and in satellite sensor calibration, PAR sensors are generally used to determine the zone in which light levels favor primary production.

Various options are now listed as commercially available for deployment on gliders, and are briefly described below.

II.H.1. *Satlantic AUV Irradiance sensor (OCR504-ICSW)*

Satlantic produces a series of multispectral radiometers. One of these, the OCR504 (**Figure 8a**), can be configured as a 4-channel Irradiance sensor (Satlantic 2013a). The sensor can be mounted onto a Slocum glider with a 10-inch cable. Specifications are listed in **Table 10**.

II.H.2. *Satlantic AUV Radiance sensor (OCR504-R10W)*

Satlantic's OCR504 (**Figure 8a**) can also be configured as a 4-channel Irradiance sensor, also for mounting onto a Slocum glider (Satlantic 2013a). Specifications are listed in **Table 10**.

II.H.3. *Biospherical Instruments PAR sensor (QSP 2000 series)*

A Biospherical Instruments PAR sensor (**Figure 8b**) (Biospherical Instruments 2011) was deployed on a Seaglider operated by the University of East Anglia (Jan Kaiser, personal communication). Specifications are listed in **Table 10**.

II.H.4. *Satlantic PAR sensor*

According to the product catalogue (Teledyne Webb Research 2013), the Slocum glider can be configured to accommodate a Satlantic Logarithmic AUV PAR sensor (**Figure 8c**) (Satlantic 2012). Specifications are listed in **Table 10**.

D5.2



Figure 8: Radiance and irradiance sensors deployable on gliders: (a) the Satlantic Irradiance/Radiance sensor OCR504 (Satlantic 2013c), (b) the Biospherical Instruments PAR sensor, QSP 2000 series, (c) the Satlantic PAR sensor (Satlantic 2013c).

Table 10: Radiance and irradiance sensors available for operation on gliders.

Manufacturer and model	Satlantic AUV Irradiance sensor (OCR504-ICSW)	Satlantic AUV Radiance sensor (OCR504-R10W)	Biospherical Instruments PAR sensor (QSP-2000 series)	Satlantic PAR sensor
Glider platform	Slocum		Seaglider	Slocum
Weight (kg)	Air: 0.2 Water: 0.04		Air: 1.1	Air: 0.127
Dimensions (cm)	4.6 (Ø) × 9.8		5 (Ø) × 15	3 (Ø) × 7.6
Materials	Anodized aluminum		PTFE sphere on aluminum housing	Plastic
Power supply (VDC)	6-22			6-30
Current (mA)				5 (anal) 15 (digi)
Depth rating (m)	2000 m			600
Effective λ (nm)	400-700 (customizable)		400-700	400-700
PAR dynamic range	-		$1.4 \times 10^{-5} - 0.5 \mu\text{E} \cdot \text{cm}^{-2} \cdot \text{sec}^{-1}$	$0 - 5000 \mu\text{E} \cdot \text{m}^{-2} \cdot \text{sec}^{-1}$
Reference	Satlantic (2013a)		Biospherical Instruments (2011)	Satlantic (2012)

D5.2

II.I. Animal biomass and presence

While microbial biomass (i.e., bacteria, archaea, and small phytoplankton and zooplankton) can potentially be detected using turbidity backscatter (see Section II.E), larger animals can be passively detected by echo-sounding using acoustic sensors. Animal detection is not limited to echo-sounding, however. Underwater mammal detection, for instance, is mostly achieved by recording audible communications using hydrophones. Moreover, where individuals of species don't communicate audibly, they can be fitted with transmitters, and their signals detected by appropriately tuned receivers. Gliders can now be fitted with sensors employing echo-sounding, sound recording and telemetry to serve these needs. These sensors are briefly described below.

II.I.1. *Imagenex 853 Echosounder*

Imagenex, at the request of the University of East Anglia, developed a 120 kHz echo-sounder with a data logger, the Imagenex 853 Echo-sounder (**Figure 9a**), to be mounted on a Seaglider in order to detect zooplankton abundance (Imagenex 2013). The echo-sounder was used in early 2012 in the Weddell Sea, and its performance was tested using known targets such as krill swarms (Guihen et al. 2012). A serial interface allows transmission of the collected data during surfacing via satellite. According to Imagenex (Steve Curnew, personal communication), Teledyne Webb has also purchased and integrated this sensor on Slocum gliders. Specifications for the Echo-sounder are shown in **Table 11**.

II.I.2. *VEMCO Mobile Transceiver (VMT)*

During a study in late 2011, a VEMCO (2013) Mobile Transceiver (VMT) mounted on a Slocum glider (**Figure 9**) was used to detect telemetered (transmitter-fitted) Atlantic sturgeon (Oliver et al. 2013). Since 2012, a Slocum-integrated VMT has been used to detect telemetered tiger sharks (Oliver 2012). According to preliminary information provided by VEMCO (Denise King, personal communication), the Slocum-integrated instrument is based on a customized cabled receiver, the VR2C (**Figure 9b** and c), and is now listed in the Slocum G2 Glider product catalogue (Teledyne Webb Research 2013).



Figure 9: (a) The Imagenex 853 Echo-sounder (Imagenex 2013), (b) A VEMCO Mobile Transceiver

(VMT) mounted on a Slocum glider (Oliver et al. 2013), (c) The VEMCO cabled receiver VR2C (Denise King, personal communication).

D5.2

Table 11: Specifications for the Imagenex 853 Echo-sounder (Imagenex 2013).

Manufacturer and model	Imagenex 853 Echosounder
Glider platform	Seaglider, Slocum
Weight (kg)	Air: 1, Water: 0.55
Dimensions (cm)	8.3(Ø) × 7.9
Materials	6061-T6 Aluminum, PVC
Power supply (VDC)	9-32
Wattage (W)	< 0.25
Depth rating (m)	1000
Min-max detectable range (m)	0.5-100
Frequency (kHz)	120
Beam width	10°
Source level (nominal)	210 dB re 1 µPa at 1 m
Pulse length (µs)	100
Receive sensitivity (nominal)	-180 dB re 1 V/µPa
Receive bandwidth (kHz)	10
Reference	Imagenex (2013)

II.1.3. SonTek 760 kHz ADP

Davis et al. (2008) used the backscatter strength from a SonTek ADP on a Spray glider as an indicator of zooplankton biomass. According to the company, this product was only produced for this research group and is now discontinued (Joel Edelman, personal communication).

D5.2

II.J. Marine mammal detection

II.J.1. High Tech Inc. HTI-99-HF hydrophone (PAAM system)

Klinck et al. (2012) have reported the incorporation of High Tech Inc. HTI-99-HF hydrophones on Seagliders as part of a passive autonomous acoustic monitoring (PAAM) system for the detection of marine mammals. PAAM involves the recording of signals, their compression, screening for mammal calls using a detection algorithm, and reporting of detection events when surfacing. The design and testing of PAAM research was funded by ONR and involved experimentation with multiple hydrophones at various configurations (*Figure 10a*).

II.J.2. WHOI Digital Acoustic Monitoring Device (DMON)

Another alternative is a new self-contained, low-power digital acoustic monitoring device (DMON; *Figure 10b* and *c*), manufactured by the Woods Hole Oceanographic Institution (WHOI) specifically for passive acoustic detection for both Slocum gliders and Seagliders (Hurst et al. 2012). DMON has the necessary broadband and low-noise signal acquisition capabilities necessary for mammal sound detection. It records sound to solid-state memory either continuously or when a detection is made, and consequently offers low power consumption (longer deployment lifetime).

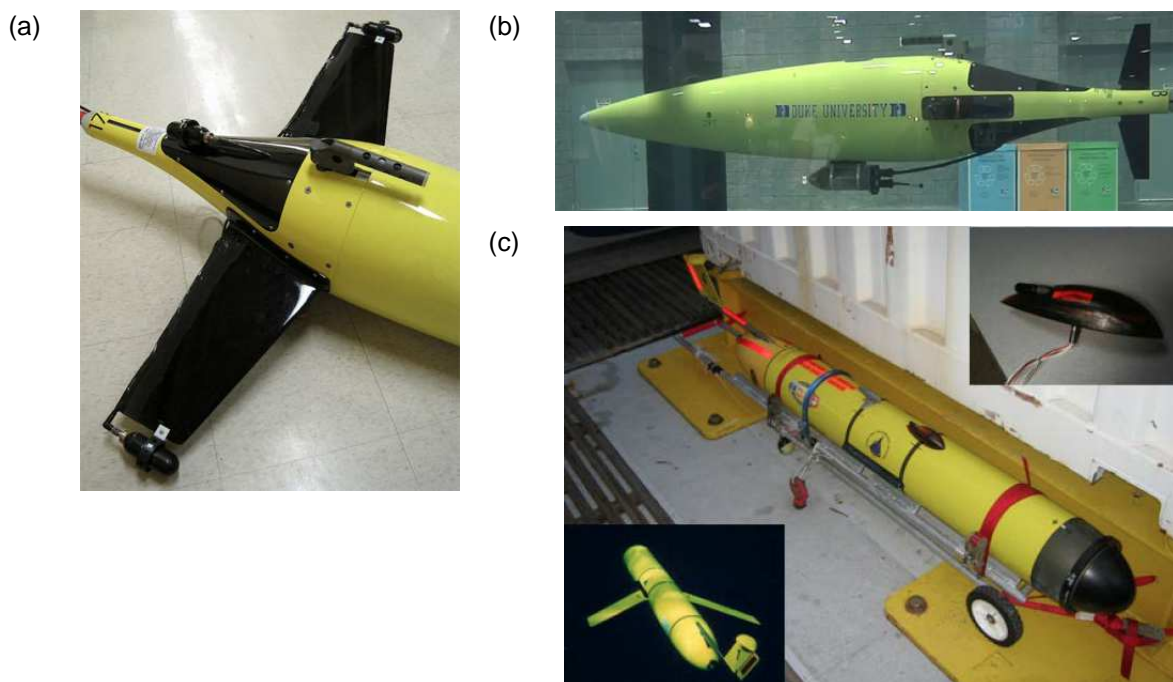


Figure 10: (a) Three High Tech Inc. HTI-99-HF hydrophones mounted on a Seaglider as part of a PAAM system (Bogue and Luby 2011); A WHOI DMON integrated with (b) a Seaglider, and (c) a Slocum glider (Hurst et al. 2012).

II.K. Turbulence

II.K.1. *Rockland SI MicroRider-1000 (MR-1000-6)*

Rockland Scientific Instruments produces a turbulence profiler, the MicroRider-1000 (**Erreur ! Source du renvoi introuvable.**), a modular multi-instrument package carrying velocity shear probes, thermistors, a micro-conductivity probe, a high-resolution pressure sensor and acceleration sensors, and a tilt sensor (Rockland Scientific 2013a). The MicroRider is currently used on Slocum gliders operated by the GEOMAR glider fleet (Gerd Krahnmann, personal communication). Furthermore UIB has interfaced one of its Slocum gliders with a MicroRider that is provided by a separate project (Ilker Fer, PI, personal communication). The deployments in the Faroe Bank Channel using the UIB Slocum equipped with the MicroRider suggest that a glider is a suitable platform for turbulence measurements both using shear probes (Fer et al. 2014) and fast response thermistors (Peterson and Fer 2014). Technical specifications of the MicroRider are shown in **Table 12**.



Figure 11: (a) The Rockland SI MicroRider-1000 (Rockland Scientific 2013a), mounted on (b) a Slocum glider (Rockland Scientific 2013a), and (c) a Spray glider (Rockland Scientific 2013b)

II.K.2. *Nortek Aquadopp HR ADCP*

The Nortek Aquadopp that appears in section II.G.2 above can be configured in "HR" mode (Nortek 2013); "HR" stands for "High Resolution" which is synonymous for pulse-coherent processing. In HR mode (different firmware, same transducers/electronic boards as a 3000 m Aquadopp in the case of a glider application), the sensor can measure very near-field velocities using the measurement of phase shifts rather than frequency shifts. For the 1 MHz (2 MHz) model, bin size is as low as 2.0 cm (0.7 cm). Maximum range is 6 m (3 m). This has been shown sufficient for measuring turbulence from a profiling body as well as mean horizontal currents (Rusello et al. 2011).

D5.2

Table 12: Technical specifications of the MicroRider turbulence profiler (Rockland Scientific 2013a).

Manufacturer and model	Rockland SI MicroRider-1000
Glider platform	Slocum, Spray
Weight (kg)	Air: 5.5, Water: 0
Dimensions (cm)	10 (Ø) × 1.02
Materials	6061-T6 Aluminum, PVC
Power supply (VDC)	9-18
Wattage (W)	1
Depth rating (m)	1000
Velocity shear range, accuracy, resolution	$3 \times 10^{-10} - 10^{-4} \text{ W kg}^{-1}$, 5 %, $2.5 \times 10^{-3} \text{ s}^{-1}$
Water temperature range, accuracy, resolution	-5 – 35 °C, $1 \times 10^{-3} \text{ °C}$, $1 \times 10^{-4} \text{ °C}$
Microtemperature range, resolution	-5 – 35 °C, $1 \times 10^{-5} \text{ °C}$
Conductivity range, accuracy, resolution	0 – 7 S m ⁻¹ , 0.0003 S m ⁻¹ , 0.00004 S m ⁻¹
Microconductivity range	0 – 7 S m ⁻¹
Pressure range, accuracy, resolution	0 – 1000 dbar, 0.1 %, 0.0005 dbar
Accelerometer range, accuracy, resolution	±2 g, 0.5 %, $3 \times 10^{-5} \text{ g}$
Tilt sensor range, accuracy, resolution	Dual axis ± 90°, 0.1°, 0.025°
Reference	Rockland Scientific (2013a)

D5.2

II.L. Wind

II.L.1. Greeneridge Sciences Inc. Acousonde

Acousonde (**Erreur ! Source du renvoi introuvable.**) is a miniature, self-contained, autonomous acoustic/ultrasonic recorder designed for underwater applications, produced by Greeneridge Sciences Inc., and distributed by Cetacean Research Technologies (Greeneridge Sciences Inc. 2012). Cauchy et al. (2013) have used it as an external autonomous device on Slocum and Seaglider gliders to record underwater sounds (from 2kHz to 40kHz). An external battery housing for lithium batteries was especially developed to increase the device's autonomy (Burgess 2012). By post processing the data using the methods described in Ma et al. (2005), Cauchy et al. (2013) have been able to successfully estimate wind speeds at sea surface. Rainfall rate estimation is still pending (Pierre Cauchy, personal communication). It is notable that wind direction, which cannot be obtained from the acoustic device, can be determined when using a Slocum glider by taking advantage of the fact that it heads towards the wind when at the surface. The specifications for the Acousonde are listed in **Table 13**.



Figure 12: An Acousonde recorded mounted externally on a Slocum glider (courtesy Pierre Cauchy).

Table 13: Technical specifications of the Acousonde recorder (Greeneridge Sciences Inc. 2012).

Manufacturer and model	Acousonde	
Weight in water (kg)	0.086	
Dimensions (cm)	3.2 (∅) × 22.1	
Power supply (VDC)	4.5	
Depth	500/1000/2000/3000 m	
Lifetime	6-14 days (maximum if sampling < 26kHz)*	
Max sampling rate	232 kHz	
Acoustic sampling resolution	16 bits	
	low-power channel	high-frequency channel
Unamplified sensitivity, re 1 V/μPa (db)	-201	-204
Saturation at 0-db gain, re 1 μPa zero peak (db)	187	172
Anti-alias filter	8-pole elliptic, adjustable to 9.2 kHz	6-pole linear phase, fixed
3-db anti-alias cutoff (kHz)	9.2	42
22-db anti-alias cutoff (kHz)	11.1	100
3-db high-pass cutoff (kHz)	22	10

D5.2

Reference	Greeneridge Sciences Inc. (2012)
------------------	----------------------------------

* 2 months if recording for 1 min every 10 min (Pierre Cauchy, personal communication).

D5.2

II.M. Nitrate (NO₃⁻)

II.M.1. Satlantic SUNA v2

Johnson and Coletti (2002) developed an optical sensor for the detection of nitrate (NO₃⁻), which exhibits a distinct absorbance peak at 216-220 nm, i.e., in the ultra-violet (UV). The sensor, then dubbed ISUS (In Situ Ultraviolet Spectrophotometer), was able to measure spectra in the UV (< 280 nm) with high resolution, approx. 1 nm, and using a least-squares-fitting algorithm, allowed the deconvolution of the effects of other interfering chemical species, primarily bromide, bisulfide and CDOM. The ISUS is now marketed for glider (and other) uses as SUNA v2 by Satlantic (2013b). Technical specifications are listed in **Table 14**. The SUNA v2 is composed of a straight-through quartz sample chamber of a path length of 1 cm (**Figure 12a**) and a microcontroller used for data processing. The optical sensing system is designed to measure absorption spectra at 1 nm resolution. The resulting spectra are de-convoluted into contributing species concentrations, so that NO₃⁻ concentrations can be reported at a rate of 1 Hz.

Satlantic already provides a Slocum glider mounting package (**Figure 12b**) for the deep version of SUNA v2 that consists of a plastic nose cone and connector end-cap attachments that have 1/4"- 20 threaded mounting points (Satlantic 2013b). The mounting package is designed in such a way so that the sensor is mounted on the top side of the glider and oriented in such a manner as to prevent air bubbles and sediment from becoming trapped in the sample chamber. Jones et al. (2011) report the deployment of the SUNA sensor on a Slocum glider. However, there appear to be unresolved issues with its operation, e.g., pre-mission calibration, on-board concentration computations, etc., necessitating further work on this sensor before it is declared mission-proved.

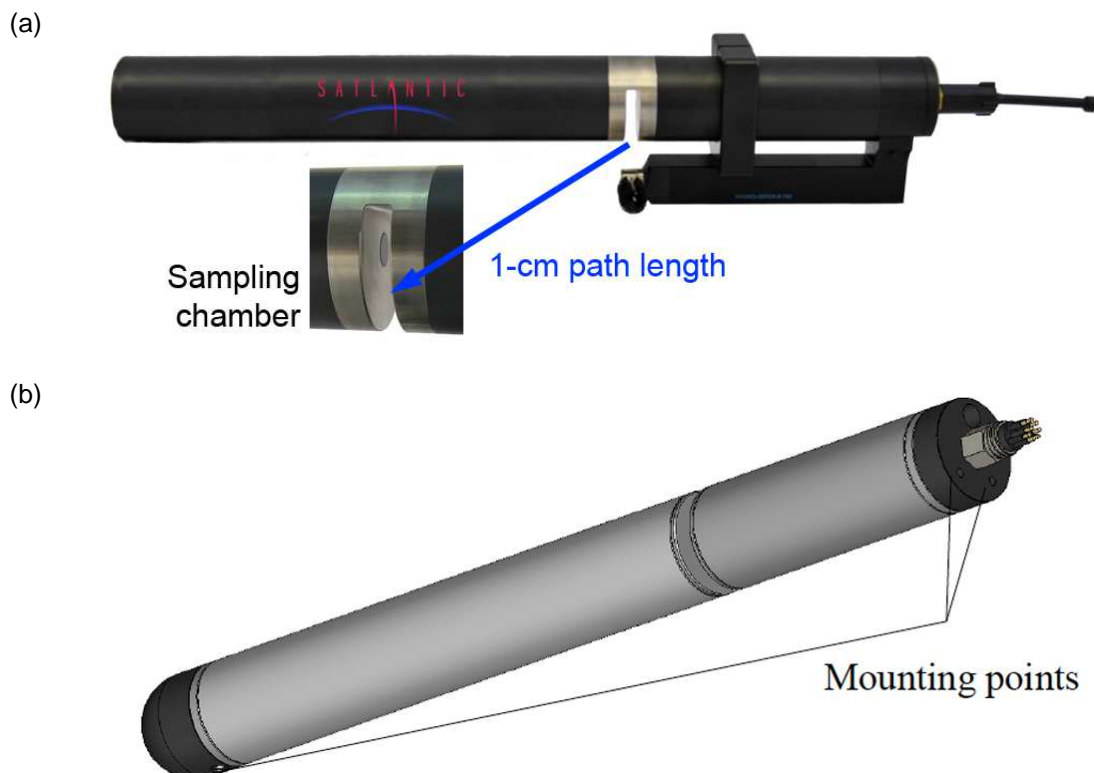


Figure 12: The Satlantic SUNA v2: (a) the sensor with close-up of the sampling chamber and circular quartz window (Satlantic 2013c), (b) Mounting package for deployment on a Slocum glider (Satlantic 2013b)

D5.2

Table 14: Technical specifications of the Satlantic SUNA v2 sensor, deep version for mounting onto Slocum gliders (Satlantic 2013b).

Manufacturer and model	Satlantic SUNA v2
Weight (kg)	1.8
Dimensions (cm)	5.7 (Ø) × 55.5
Power supply (VDC)	5-18
Wattage (W)	7.5
Current (mA)	625 mA at 12 V (nominal), 20 mA at 12 V (standby)
Depth	2000 m
Material	Anodized aluminum
Lifetime	900 h (2-4 weeks)
Spectral range (nm)	190-370
Concentration range (µM)	0 to 1000, 2000, 3000, and 4000
Accuracy	± 2 µmol L ⁻¹ or ± 10% of reading, whichever is greater
Precision	± 2.4 µmol L ⁻¹ (in seawater, 0-40 psu)
Limit of detection	2.4 µmol L ⁻¹ (in seawater, 0-40 psu)
Internal Memory	2 GB
Telemetry	Real time
Reference	Satlantic (2013b)

III. PROTOTYPES AND SENSORS IN DEVELOPMENT FOR GLIDERS

In this section, we catalogue sensors that are or were explicitly being developed for or have been tested already on gliders. Brief statements in the published literature or in the public domain have been supplemented with information from companies and individuals to obtain a general sense of the stage of development and/or testing a sensor is in and to, consequently, determine its readiness level as well as its availability to others than the original users.

III.A. Radioactivity

III.A.1. Amptek Gamma-Rad NaI Scintillation Probe

Jones et al. (2011) first reported the integration of an Amptek Gamma-Rad NaI Scintillation Probe into a dual science payload bay of a Slocum glider. Two probes have been flight-tested since, but not routinely operated for longer time periods (Clayton Jones, personal communication). At this point, no more information is available on the success of the deployment and the data obtained.

III.B. Video imagery

III.B.1. Mounted digital video cameras

Glenn and Schofield (2009) reported that video imagery instruments were carried by Slocum gliders. To this effect, a video camera science bay was built to carry an internally mounted digital camera looking out a window (Oscar Schofield, personal communication). Images were successfully obtained throughout the deployment, but this was a one-time test, and no further deployments or use have taken place.

III.C. Multiple optical properties

III.C.1. Turner Designs Cyclops sensors

Jones et al. (2011) reported the integration of a Turner Cyclops sensor onto a Slocum glider. Tests with the Turner Cyclops are still underway and undergoing a comparison study (Clayton Jones, personal communication), after which it will be available soon as a full product line. According to Turner Designs (2013), the Cyclops is available for numerous parameters, including chlorophyll, turbidity, CDOM/FDOM, phycocyanin, phycoerythrin, and oil.

D5.2

IV. READILY ADAPTABLE SENSORS FOR GLIDER USE

IV.A. Overview

Glider sensors share a set of attributes that, when combined, create unique design restrictions:

- Compact size and light weight (payload limited to 2-5 kg), and consequent miniaturization of components, and modification to limit interference with navigation,
- Low energy consumption to extend glider endurance,
- On-board data-processing capacity, and
- Real-time or near-real-time data transmission requirements.

It is evident how these attributes, in isolation or in combination with one another, may also apply in the case of other platforms, most notably autonomous underwater vehicles (AUVs) as well as Argo floats. It is, therefore, natural that sensors already employed in the cases of AUVs and floats are much more readily adaptable for use on gliders than tethered or moored instruments.

Consequently, the section that follows draws heavily from advances in sensor technologies already used on small mobile platforms. It should be noted that most industry partners are ready and willing to work on integrating such sensors onto gliders, but usually the cost for developing an integrated prototype is a burden that the routine expenses of a glider facility cannot overcome.

Please note that prospective biogeochemical parameters and sensors are addressed in GROOM deliverable D3.5. Please consult that deliverable for more information and details.

D5.2

IV.B. Nutrients

SubChem Systems Inc. (2013) produces three "wet-chemistry" sensors that, with the use of microfluidics, allow the colorimetric (spectrophotometric and fluorometric) analysis of small-volume seawater samples for any compound for which colorimetric methods exist. These three sensors, the APNA, ChemFIN, and MARCHEM, have been especially designed for low-power, minimal payload platforms, and have all been used on AUVs for a variety of applications, but most notably for nutrient (NO_3^- , NO_2^- , PO_4^{3-} , $\text{Si}(\text{OH})_4$, NH_4^+) analysis, as well as unexploded ordinance (see Section IV.C) and toxins released during harmful algal blooms (see Section IV.D).

IV.B.1. SubChem APNA

The Autonomous Profiling Nutrient Analyzer (APNA, **Figure 13a**) is an autonomous, multi-channel submersible chemical analyzer utilizing spectrophotometric and fluorometric analytical methods for continuous or intermittent in situ measurements of nutrients, trace metals and other chemicals. Its minimal payload features allow deployments on shipboard profiling systems and also on autonomous platforms (Hanson et al. 2006). APNA can be configured for 3, 4 or 5 channels for either continuous operation (i.e., 1 Hz when profiling) or intermittent measurements (10-15 minutes per measurement cycle). A Sensor Integration Module (SSIM) allows real-time data acquisition/transmission. APNA's main specifications are listed in **Table 16**.

IV.B.2. SubChem ChemFIN

ChemFIN is a 1-2 channel analyzer configured for the detection of nutrients in seawater (SubChem Systems Inc. 2011b). It is a small independent sensor payload, which has successfully been mounted onto AUVs (**Figure 13b**). A ChemFIN design review meeting (San Diego, January 2007) led to an improved specification for the best means of integrating the ChemFIN single channel analyzer on to gliders. It was determined the best interface to a glider would be the wing interface to the hull (Alberto Alvarez, personal communication). A new wing interface was also designed to allow the ChemFIN housing to be clamped to the port or starboard side along the centerline of the glider. SubChem Systems Inc.'s partners also determined the best electronic interface to the glider would be a new multi-cable termination at the aft end of the vehicle that would have another cable running forward to the ChemFIN housing end cap. **Table 15** summarizes ChemFIN's main specifications.

IV.B.3. SubChem MarChem

A third SubChem Systems Inc. compact, low power submersible chemical analyzer payload for deployment on AUVs (originally for the Kongsberg/Hydrod REMUS 100 AUV) is the Micro AUV Ready Chemical Analyzer (MarChem). The MarChem (SubChem Systems Inc. 2009) is a two-channel sensor capable of performing real-time, rapid response measurements of nutrients in trace concentrations in marine waters while mounted on AUVs (**Figure 13c**). The technical specifications for the MarChem are identical to the ChemFIN Analyzer (**Table 15**), except that the MarChem is mechanically configured (housing shape and size) to adapt it to the Autonomous Under Water Vehicle (AUV) or glider hull section of choice (Alfred K. Hanson, personal communication).

IV.B.4. SUV-6 nitrate sensor

The National Oceanography Centre (UK), in collaboration with Valeport Ltd., developed an ultraviolet nitrate (NO_3^-) sensor, the SUV-6, with an improved accuracy, twice that of other similar sensors, which improves the utility of UV NO_3^- detection in open-ocean, nutrient-poor settings (Pidcock et al. 2010). The basic principles of this detection method have already been described in this deliverable (see section II.M.1). The SUV-6 measures absorption at 205, 220, 235, 250, 265, and 280 nm, and corrections based in the readings at these wavelengths may be applied to normalize absorption at 220 nm, which correlates with NO_3^- concentration. Technical specifications for this sensor are listed in **Table 15**.

D5.2

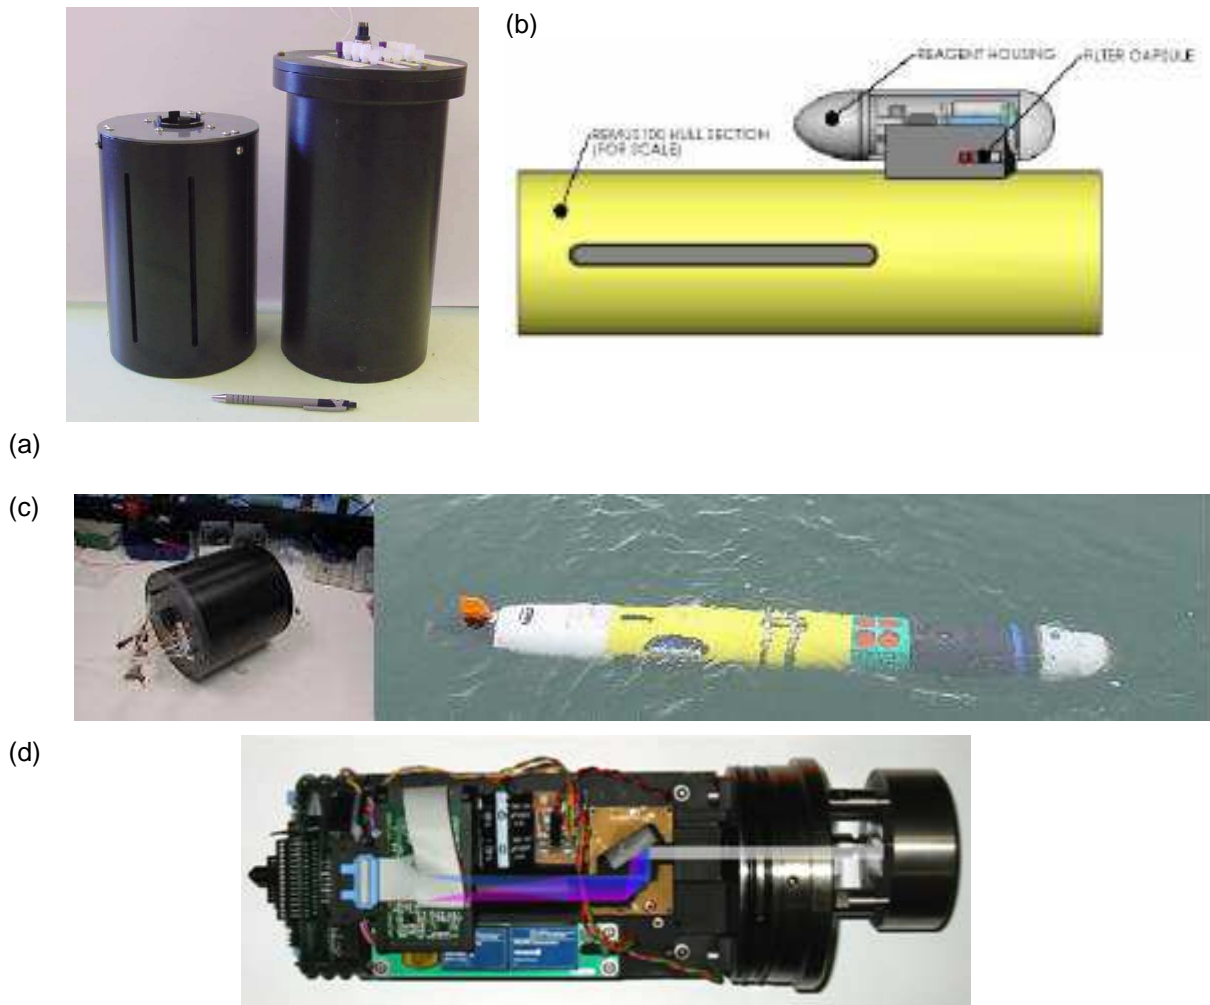


Figure 134: "Wet-chemistry" analyzers for autonomous platforms manufactured by SubChem Systems Inc: (a) APNA reagent reservoir (left) and the analyzer (right) (SubChem Systems Inc. 2011a), (b) The ChemFIN sensor externally mounted onto a Remus AUV (Hanson and Kusterbeck 2009), (c) Integration of MarChem analyzer (left) into a Remus 100 AUV (SubChem Systems Inc. 2013), (d) The SUV-6 nitrate sensor developed by the National Oceanography Centre (UK) and Valeport Ltd. (NOC 2013).

D5.2

Table 15: Technical characteristics of two multi-nutrient (NO_3^- , NO_2^- , PO_4^{3-} , $\text{Si}(\text{OH})_4$, NH_4^+) sensors developed by SubChem for use with AUVs, and a UV NO_3^- sensor, SUV-6, deployed on a SeaSoar towed vehicle.

Manufacturer and model	SubChem APNA	SubChem ChemFIN	SUV-6
Weight (kg)	Air: 8.8, Water: 1.4	Water: 2.9	
Dimensions (cm)	16.8 (Ø) × 32.6	10 (Ø) × 33	11.3 (Ø) × 40
Displacement (cm³)		2700	
Materials	Peek, PVC, Nylon, Aluminum, Delrin, AcetalGP	Non metallic, Acetal	Aluminium alloy
Input Voltage (VDC)	12	12-15	
Wattage (W)	28 (Analysis)	3 (Analysis)	1 (at 8 Hz)
Depth rating (m)	200	600	5000
Lamp Lifetime	7 d (continuous) 2-3 mo (intermittent, ~2000 measurements)	500 h	2500 h
Wavelength Range (nm)	370 – 820	370 – 820	205-280
Detection Range (µmol L⁻¹)	0.02 – 170		0-100
Accuracy	± 1 – 3 %	± 2 %	± 0.2 µmol L ⁻¹
Internal Memory (GB)	1-8	8	
Telemetry	Real time	Real time (Acoustic, RF, cellular, Wi-Fi, Iridium, LAN)	
Reference	SubChem (2011a)	SubChem (2011b)	Finch et al. (1998), Pidcock et al. (2010)

IV.C. Unexploded ordinance

IV.C.1. NRL/SubChem Systems ordinance immunosensor

The U.S. Naval Research Laboratory (NRL), in collaboration with SubChem Systems Inc., have developed an in-situ seawater chemical analyzer (Adams et al. 2011, Charles et al. 2011) for the detection of small nitroaromatic molecules, such as 2,4,6-Trinitrotoluene (TNT). The sensor employs monoclonal antibodies specific for TNT, which are immobilized on the microchannel walls of the microfluidic device, and whose binding regions are occupied by a fluorescent analogue of TNT (**Figure 14a**). When actual TNT is present in the sample, it displaces the fluorescent analogue, which then enters the detection stream thus increasing the fluorescent signal detected by the sensor.

The sensor has been successfully deployed and operated on a Hydroid REMUS 100 AUV (Adams et al. 2013). The nosecone of the AUV housed the sample intake, which extended beyond the nose of the AUV within the free flow boundary layer (**Figure 14b**), while the microfluidic system was placed on the forward bulkhead of the immune-sensor, referred to as the coupon interface (**Figure 14c**), thus rendering it easily replaceable when spent. Moreover, this coupon can be customized for the detection of other compounds depending on the antibodies used. While sampling, the power draw is on the order of less than 3 W, while on standby mode it is <math><120 \mu\text{W}</math>. The sensor is designed to be a 12 VDC nominal device. **Figure 15** shows a prototype sensor deployed on a REMUS 100 AUV.

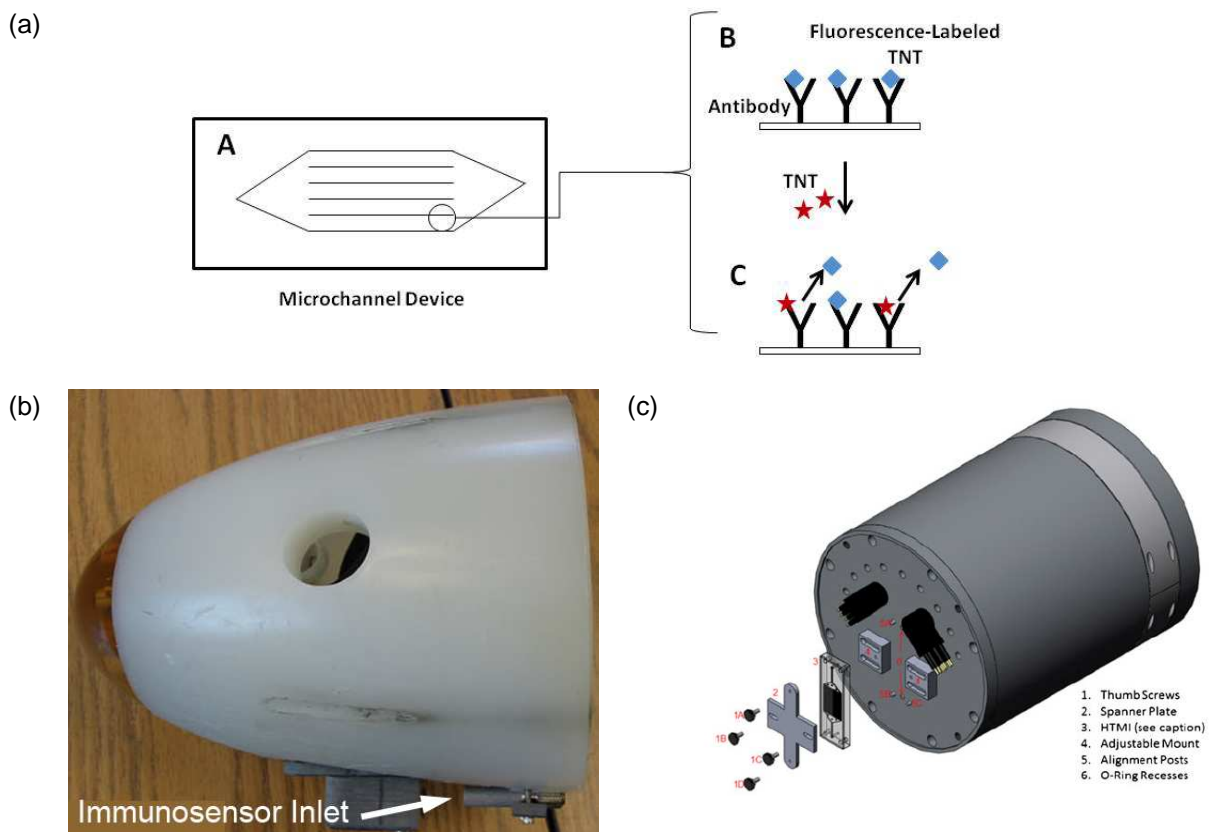


Figure 14: (a) Schematic illustrating the process employed by the immune-sensor for TNT detection: TNT in the sample displaces the fluorescent TNT analogue immobilized on TNT-specific monoclonal antibodies; as the fluorescent analogue enters the stream, it increases the fluorescent signal detected by the sensor (Charles et al. 2011), (b) Location of the immune-sensor inlet on the nosecone of the REMUS 100 AUV (modified from Adams et al. 2013), (c) The microfluidic device is mounted on the forward bulkhead, also known as the coupon, of the immune-sensor (modified from Adams et al. 2013).

D5.2

IV.D. Harmful algal bloom (HAB) toxins

IV.D.1. *SubChem MarChem*

The Naval Research Laboratory (NRL, USA), in collaboration with SubChem, has demonstrated that MarChem can be used to detect saxitoxin and domoic acid (Hanson and Kusterbeck 2010, 2011), two toxins released by marine algae, which occasionally accumulate to abundances high enough to create harmful algal blooms (HABs).

As described previously in this report (see section IV.C.1), the SubChem sensors allow the easy configuration of the microfluidic system, also called the coupon, according to the desired analysis. In 2010, the principles of testing for a toxin, in this case domoic acid, were tested using the MarChem sensor (Hanson and Kusterbeck 2010), followed by a successful deployment of the sensor on a REMUS 100 AUV in parallel with ongoing work on an immuno-sensor (**Figure 15**).

In 2011, a coupon for saxitoxin was prepared using mouse monoclonal antibodies and fluorescently labeled saxitoxin (Hanson and Kusterbeck 2011). Samples were excited at 632 nm and the emission at 665 nm was monitored, yielding a linear relationship between saxitoxin concentration and sensor response, thus demonstrating the potential utility of such a sensor on an AUV.



Figure 15: A prototype MarChem sensor (configured for use as an NRL/SubChem Systems ordinance immunosensor) deployed on a REMUS 100 AUV (Hanson and Kusterbeck 2010).

IV.E. Carbon dioxide ($p\text{CO}_2$)

IV.E.1. *Contros HydroC™ CO₂*

The Contros HydroC™ CO₂ sensor is an underwater CO₂ sensor that employs non-dispersive infrared spectrometry (NDIR), by allowing the seawater sample to equilibrate with the gas in an internal gas circuit where NDIR takes place (CONTROS 2011b). Its effectiveness and promise as a sensor on an autonomous platform has been demonstrated by Fiedler et al. (2013), who successfully deployed it on Argo floats during four missions lasting 14-56 days each in 2010-2011. Its small size and weight (**Figure 16a**) recommend it for integration into gliders (technical specifications are listed in **Table 16**).

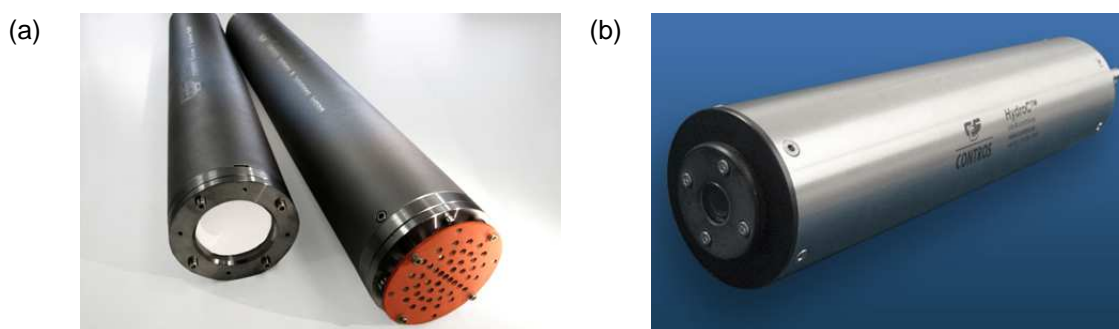


Figure 16: (a) CONTROS titanium housings for the HydroC™ CO₂ and CH₄ sensors; the housing on the right carries the optional copper biofouling protector, (b) CONTROS HydroC™ PAH sensor in a titanium housing (both images from CONTROS 2013).

IV.F. Methane (CH₄)

IV.F.1. *CONTROS HydroC™ CH₄*

CONTROS also manufactures an underwater CH₄ sensor, the HydroC™ CH₄ (**Figure 16a**). The dissolved CH₄ is measured using the same principle and procedures as CO₂, using NDIR (CONTROS 2011a). The specifications for the sensor are shown in **Table 16**.

IV.G. Hydrocarbons

IV.G.1. *CONTROS HydroC™ PAH*

The CONTROS HydroC™ PAH fluorometer (**Figure 16b**) detects hydrocarbons by illuminating the sample at 254 nm and detects emitted radiation at 360 nm (CONTROS 2011c). The housing design is representative of the HydroC™ sensors, and therefore is eminently suited for integration into minimal payload platforms such as gliders. The specifications of the sensor can be seen in **Table 16**.

IV.G.2. *WETLabs Eco Puck (models including FL designation)*

WETLabs has explored the potential of their CDOM fluorometers (see Section II.C.1) as detectors of oil in seawater during the Deep Water Horizon oil spill, and has assembled the relevant documentation on its web-site (WETLabs 2013). While initial indications from this application are promising (Joint

D5.2

Analysis Group for the Deepwater Horizon Oil Spill 2011), more work must be done to render the optical specifications of the sensor more definitive to the presence of oil.

D5.2

Table 16: Technical characteristics of HydroC™ sensors for CO₂, CH₄ and PAH.

Model	HydroC™ CH₄	HydroC™ CO₂	HydroC™ PAH
Chemical parameters	CH ₄	CO ₂	PAH, Diesel, Crude Oil, Marine Diesel (MDO), Marine Gas Oil (MGO), Fuel Oil
Weight (kg)	Air: 4.7, Water: 2.2		Air: 4.4, Water: 2.7
Dimensions (cm)	9 (∅) × 37.6		7.5 (∅) × 32
Depth rating (m)	2000/4000/6000		6000
Materials	Titanium		
Current (mA)	300		
Wattage (W)	7.5		3 (max)
Range	100 nmol L ⁻¹ – 50 µmol L ⁻¹	200 – 1000 ppm	0 – 500 µg L ⁻¹
Resolution	10 nmol L ⁻¹	< 1 [ppm]	0.1 ppb
Accuracy	± 3 %	± 1 %	
Software	Software DETECT™ included (real time data visualization, setting of sensor parameters, download data from internal data logger)		
Internal memory			Option internal SmartDI datalogger with 2 GB CompactFlash Memory
Reference	CONTROS (2011a)	CONTROS (2011b)	CONTROS (2011c)

D5.2

IV.G.3. TriOS Optical Sensors EnviroFlu-HC

The EnviroFlu-HC fluorometer (**Erreur ! Source du renvoi introuvable.**) is designed to measure PAH fluorescence at excitation and emission wavelengths of 254 nm and 360 nm, respectively (TriOS Optical Sensors 2013). The relevant specifications are shown in **Table 17**.



Figure 18: The TriOS EnviroFlu-HC fluorometer (TriOS Optical Sensors 2013).

Table 17: Specifications of the TriOS Optical Sensors EnviroFlu-HC sensor used for PAH fluorescence measurements.

Manufacturer and model	TriOS Optical Sensors EnviroFlu-HC
Glider platform	-
Weight (kg)	In air: 1.85 (titanium), 2.7 (stainless steel)
Dimensions (cm)	6.8 (∅) × 31.1
Materials	Titanium or stainless steel
Depth rating (m)	300 or 6000
Power requirements (VDC)	0-5
Current (mA)	4-20
Excitation/Emission λ (nm)	254/360
Range	0-50, 0-500 or 0-5000 ppb phenanthrene
Sensitivity	0.1 ppb phenanthrene
Sensing distance (cm)	0.5
Reference	Tedetti et al. (2010), TriOS Optical Sensors (2013)

D5.2

IV.G.4. CNRS/MIO MiniFluo-UV fluorometer

Recently, the Mediterranean Institute of Oceanography (MIO, Marseille) has developed an original submersible fluorometer in Puck™ format (**Erreur ! Source du renvoi introuvable.**) to simultaneously measure phenanthrene and tryptophan compounds in the marine environment (Tedetti and Goutx 2012, Tedetti et al. 2013). Phenanthrene fluorescence is measured at excitation and emission wavelengths of 255 nm and 360 nm, respectively, while tryptophan fluorescence is measured at excitation and emission wavelengths of 280 nm and 340 nm, respectively. The MiniFluo-UV, which has been deployed at sea on CTD profilers, is currently being mounted on the SeaExplorer glider. Its specifications are listed in **Table 18**.

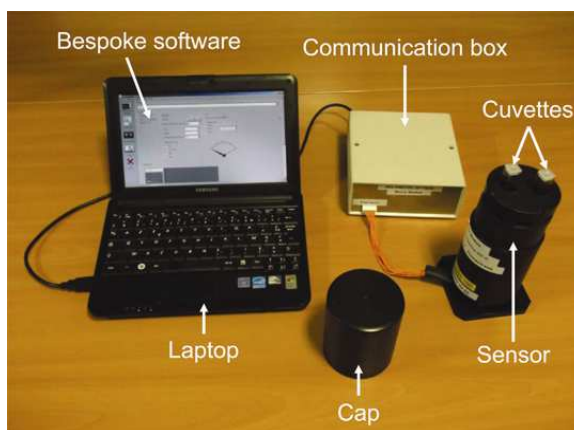


Figure 19: The Puck-format CNRS/MIO MiniFluo-UV fluorometer, labeled "sensor" on the right of the photograph (Tedetti et al. 2013).

Table 18: Specifications of the CNRS / MIO MiniFluo-UV sensor used for PAH and tryptophan fluorescence measurements.

Manufacturer and model	CNRS / MIO MiniFluo-UV
Glider platform	SeaExplorer, Slocum
Weight (kg)	0.5 (in air)
Dimensions (cm)	6.5 (∅) × 6 + cap
Materials	Aluminum, quartz
Depth rating (m)	500 (validation at 1000 m in progress)
Power requirements (VDC)	12
Current (mA)	50
Excitation/Emission λ (nm)	255/360 and 280/340
Range	0-100 ppb phenanthrene, 0-100 ppb tryptophan
Sensitivity	0.1 ppb phenanthrene, 0.4 ppb tryptophan
Sensing distance (cm)	0.5
Reference	Tedetti and Goutx (2012), Tedetti et al. (2013)

D5.2

IV.H. Bioluminescence

IV.H.1. Underwater Bioluminescence Assessment Tool (UBAT)

The Underwater Bioluminescence Assessment Tool (UBAT) was designed by WETLabs to be deployed on a variety of platforms in order to provide measurements of mechanically stimulated bioluminescence (BL) potential. The UBAT is based on the Multipurpose Bioluminescence Bathypotometer (MBBP), a compact, self-contained bathypotometer (Herren et al. 2005). The MBBP demonstrated that turbulence generated by pumping in a sample chamber of approximate volume of 0.5 L generated ample shear force resulting in the generation of bioluminescence by bioluminescent organisms in the sample.

The UBAT (WETLabs 2010) is designed to optimize the mechanical stimulation that is needed to obtain the maximum bioluminescent potential from bioluminescent organisms in the sample, while preventing pre-stimulation. Pre-stimulation is prevented by entraining the sample into an S-shaped intake. A regulated pump impeller provides the mechanical stimulation needed for bioluminescence immediately before the sample enters the 0.440 L detection chamber, where the generated turbulent flow results in multiple stimulation events. The main specifications of the UBAT are listed in **Table** .



UBAT (external view):

1. Front—intake section with internal S-shaped light baffle
2. Midsection—mounting platform
3. Back—6-pin and 3-socket MCBH connectors
4. Back—exhaust

UBAT (internal view):

5. calibration/validation port
6. detection chamber interior
7. guide pins
8. jack screw
9. flow impeller (pump impeller not shown)
10. exhaust, showing the front of the 3-turn helical light baffle
11. 6-pin MCBH connector
12. clear PMT faceplate, with arrow to the PMT baffle
13. electronics housing

Figure 20 The UBAT components (WETLabs 2010).

D5.2

Table 19 : Technical characteristics of the UBAT sensor.

Manufacturer and model	WETLabs UBAT
Weight (kg)	Air: 5.10, Water: 1.64
Dimensions (cm)	34.93 × 10.80 × 16.83
Power supply (VDC)	9-18
Current (mA)	600
Depth rating (m)	600
Materials	Acetyl copolymer plastic (chamber: Titanium dioxide and polyurethane)
Spectral Range (nm)	430-700
Detection Range	$1.50 \times 10^7 - 6.7 \times 10^{13}$ photons s^{-1}
Accuracy/Sample rate	60 Hz with 1 Hz data output rate
Internal Memory	None
Telemetry	Real time
Reference	WETLabs (2010)

IV.I. Marine mammal detection

IV.I.1. SIO High-frequency Acoustic Recording Package (HARP)

In addition to the acoustic systems described previously (see section II.J), several autonomous packages for mammal detection have the potential of being miniaturized for possible mounting on gliders. One of the most capable autonomous systems currently available for glider is a miniaturization of the High-frequency Acoustic Recording Package (HARP, **Erreur ! Source du renvoi introuvable.**) from Scripps Institute of Oceanography (SIO), an autonomous data logging system optimized for long-term, broad-band marine mammal monitoring. The HARP system includes low-power electronics, high-speed data sampling, large capacity data storage, and batteries for self-contained power (Wiggins and Hildebrand 2007).

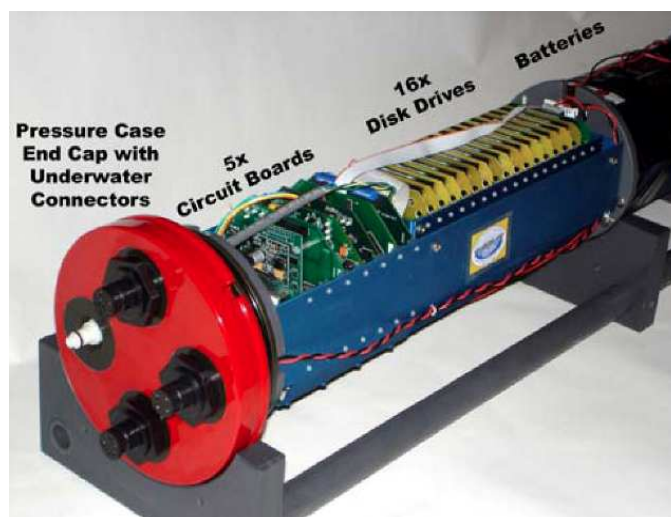


Figure 21: An open HARP logger for deployment as part of a seafloor package (Wiggins and Hildebrand 2007). The end-cap measures 7 in (almost 18 cm) in diameter.

V. DESIRED SENSORS

In this section, we elaborate on sensors that the GROOM consortium desires to be developed and which have not been covered in previous sections. There are two main drivers that can instigate the development and operation of new sensors: research needs and public policy needs. Recent EU legislation, such as the Water Framework-Directive (2000/60/EC, EC 2000) and the Marine Strategy Framework-Directive (2008/56/EC, EC 2008), and research policies are increasingly harmonizing policy goals and needs with research objectives, thus bringing the two drivers closer. This is by no means a definitive or exhaustive list, but it constitutes a consensus view at the time of the release of this deliverable.

V.A. Metals

Metals are of interest as environmental contaminants, due to their adverse impacts on several biochemical processes when in high concentrations, as well as nutrients when in trace amounts, and are therefore of interest in both coastal and offshore settings. Major metal contaminants, e.g., Cd, Pb, Ni, etc., can be detected with spectrophotometric methods, therefore the aforementioned multi-channel chemical analyzers made by SubChem (see section IV.B) or any other microfluidic analyzers can be adapted to test for such metals colorimetrically. Voltammetric electrodes constitute another option for metal detection that may be ultimately applicable on autonomous platforms.

V.B. Organic pollutants

Another major group of pollutants of interest are organic compounds such as polyaromatic hydrocarbons (PAHs), polybrominated biphenyls (PBBs), pesticides etc. Many of these organic compounds impart optical properties and, therefore, are candidates for detection by optical sensors. The example of petroleum detection after an oil spill using the WETLabs ECO Puck and the concomitant difficulties of connecting signal and compound have already been discussed (see section IV.G.2).

V.C. Particle and plankton size distributions

A comprehensive understanding of the distribution, abundance, and dynamics of particulate matter and organisms in pelagic environments is crucial to predicting the export and sequestration of biogenic carbon (Stemmann and Boss 2012). Several imaging systems of varying processing capacities have already been developed and successfully deployed from vessels (Benfield et al. 2007), along with suitable quality control procedures (e.g., Picheral et al. 2010). These systems have yet to be miniaturized enough to be mounted on or integrated with gliders. A description of what such an incorporation entails, as well as a short review of the topic are included in GROOM deliverable D3.5.

V.D. Underwater noise

Noise pollution, especially from shipping or underwater mining activities, is now recognized as an important factor that should be monitored, and is mentioned in the Marine Strategy Framework-Directive as one of the two major energy pollution types (the other being heat). Hydrophones have already been successfully used for the recording of marine mammal songs (see section II.J). Applications for these or other hydrophones to detect both continuous low-frequency noise (63-125 Hz) as well as low-frequency and middle-frequency (10 Hz to 10 kHz) impulsive sounds (EC 2010) would fill a major knowledge gap in the European seas.

D5.2

VI. BIBLIOGRAPHY

- AAI. (2012) Oxygen Sensor 3830. Retrieved from <http://www.aai.no/Aanderaa/Document%20Library/1/Data%20Sheets/Oxygen%20Optode%203830-3930-3975.pdf>
- AAI. (2012) Oxygen Optode 4831/4831F. Retrieved from <http://www.aanderaa.com/media/pdfs/Oxygen-Optode-4831-4831F.pdf>
- Adams, A. A., Charles, P. T., Deschamps, J. R., Kusterbeck, A. W. (2011) REMUS100 AUV with an integrated microfluidic system for explosives detection. In: *2011 NRL Review*, pp. 95–102, US Naval Research Laboratory, Washington D.C. Retrieved from http://www.nrl.navy.mil/content_images/11_FA3.pdf
- Adams, A. A., Charles, P. T., Veitch, S. P., Hanson, A., Deschamps, J. R., Kusterbeck, A. W. (2013) REMUS100 AUV with an integrated microfluidic system for explosives detection. *Anal. Bioanal. Chem.*, 405 (15): 5171–5178.
- Bagniewski, W., Fennel, K., Perry, M. J., D'Asaro, E. A. (2011) Optimizing models of the North Atlantic spring bloom using physical, chemical and bio-optical observations from a Lagrangian float. *Biogeosciences*, 8 (5): 1291–1307.
- Benfield, M., Grosjean, P., Culverhouse, P., Irigolen, X., Sieracki, M., Lopez-Urrutia, A., Dam, H., Hu, Q., Davis, C., Hanson, A., Pilska, C., Riseman, E., Schulz, H., Utgoff, P., Gorsky, G. (2007) RAPID: Research on Automated Plankton Identification. *Oceanography*, 20 (2): 172–187.
- Biospherical Instruments. (2011) QSP-2000, Quantum Scalar Sensors, Biospherical Instruments. Retrieved from <http://www.biospherical.com/images/pdf/qsp-2000-erf.pdf>
- Bluefin Robotics. (2010) Bluefin Spray Glider, Bluefin Robotics. Retrieved from <http://www.bluefinrobotics.com/products/spray-glider/>
- Bogue, N. M., Luby, J. C. (2011) Passive autonomous acoustic monitoring of marine mammals: System development using Seaglider™, pp. 7, US Office of Naval Research, Washington, D.C. Retrieved from <http://www.onr.navy.mil/reports/FY11/npahanso.pdf>
- Burgess, W. C. (2012) Acousonde external 3-D-cell battery housing, Greeneridge Sciences, Inc. Retrieved from <http://www.acousonde.com/downloads/Acousonde%20B003-XHD%20ext%20housing.pdf>
- Cauchy, P., Testor, P., Guinet, C., Gervaise, C., Oro, L. di, Ioana, C., Mortier, L., Bouin, M.-N., Beguery, L., Klein, P. (2013) Weather observations through oceanic acoustic noise recorded by gliders. *Geophys. Res. Abstr.*, Vol. 15, pp. EGU2013–12727, Presented at the EGU General Assembly 2013, EGU, Vienna, Austria.
- Charles, P. T., Adams, A. A., Deschamps, J. R., Veitch, S. P., Hanson, A., Kusterbeck, A. W. (2011) Explosives detection in the marine environment using UUV-modified immunosensor. *Proc SPIE Vol 8018 80181U Chem. Biol. Radiol. Nucl. Explos. CBRNE Sens. XII* (A. W. Fountain III & P. J. Gardner, eds.), Vol. 8018, pp. 80181U–80181U–8, Presented at the Chemical, Biological, Radiological, Nuclear, and Explosives (CBRNE) Sensing XII, SPIE. Retrieved from <http://proceedings.spiedigitallibrary.org/proceeding.aspx?articleid=1269035>
- Chen, R. F., Bada, J. L. (1992) The fluorescence of dissolved organic matter in seawater. *Mar. Chem.*, 37: 191–221.
- Clark Jr., L. C., Wolf, R., Granger, D., Taylor, Z. (1953) Continuous recording of blood oxygen tensions by polarography. *J. Appl. Physiol.*, 6 (3): 189–193.
- CONTROS. (2011) HydroC™/CH₄ Generation II Spec Sheet. Retrieved from http://www.contros.eu/download/11-2012/2011_10_31-Spec_HydroC_II_CH4_eng.pdf
- CONTROS. (2011) HydroC™/CO₂ Generation II Spec Sheet. Retrieved from http://www.contros.eu/download/11-2012/2011_10_31-Spec_HydroC_II_CO2_eng.pdf
- CONTROS. (2011) HydroC™/PAH Oil in Water Spec Sheet. Retrieved from http://www.contros.eu/download/Spec_HydroC_PAH_eng.pdf

D5.2

- CONTROS. (2013) CONTROS Systems & Solutions GmbH. Retrieved July 5, 2013, from <http://www.contros.eu/>
- D'Asaro, E. (2009) The 2008 North Atlantic Bloom Experiment, Calibration Report #4: Calibration of the chlorophyll fluorometers on the Knorr CTD and Float 48, pp. 13, Applied Physics Laboratory, University of Washington, Seattle, Washington.
- Davis, R. E., Ohman, M. D., Rudnick, D. L., Sherman, J. T., Hodges, B. (2008) Glider surveillance of physics and biology in the southern California Current System. *Limnol. Oceanogr.*, 53 (5, part 2): 2151–2168.
- Dickey, T. D. (2003) Emerging ocean observations for interdisciplinary data assimilation systems. *J. Mar. Syst.*, 40-41: 5–48.
- Earp, A., Hanson, C. E., Ralph, P. J., Brando, V. E., Allen, S., Baird, M., Clementson, L., Daniel, P., Dekker, A. G., Fearn, P. R. C. S., Parslow, J., Strutton, P. G., Thompson, P. A., Underwood, M., Weeks, S., Doblin, M. A. (2011) Review of fluorescent standards for calibration of in situ fluorometers: Recommendations applied in coastal and ocean observing programs. *Opt. Express*, 19 (27): 26768.
- EC. (2000) Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy. *Off. J. Eur. Union*, L 327: 1–73.
- EC. (2008) Directive 2008/56/EC of the European Parliament and of the Council of 17 June 2008 establishing a framework for community action in the field of marine environmental policy (Marine Strategy Framework Directive). *Off. J. Eur. Union*, L 164: 19–40.
- EC. (2010) Commission Decision of 1 September 2010 on criteria and methodological standards on good environmental status of marine waters (2010/477/EU). *Off. J. Eur. Union*, L 232: 14–24.
- Eriksen, C., Osse, T., Light, R., Wen, T., Lehman, T., Sabin, P., Ballard, J., Chiodi, A. (2001) Seaglider: A long-range autonomous underwater vehicle for oceanographic research. *IEEE J. Ocean. Eng.*, 26 (4): 424–436.
- Fer, I., Peterson, A. K., Ullgren, J. E. (2014) Microstructure measurements from an underwater glider in the turbulent Faroe Bank Channel overflow. *J. Atmospheric Ocean. Technol.*, 140203145211006.
- Fiedler, B., Fietzek, P., Vieira, N., Silva, P., Bittig, H. C., Körtzinger, A. (2013) In situ CO₂ and O₂ measurements on a profiling float. *J. Atmospheric Ocean. Technol.*, 30 (1): 112–126.
- Finch, M. S., Hydes, D. J., Clayson, C. H., Bernhard Weigl, Dakin, J., Gwilliam, P. (1998) A low power ultra violet spectrophotometer for measurement of nitrate in seawater: introduction, calibration and initial sea trials. *Anal. Chim. Acta*, 377 (2-3): 167–177.
- Garau, B., Ruiz, S., Zhang, W. G., Pascual, A., Heslop, E., Kerfoot, J., Tintoré, J. (2011) Thermal lag correction on Slocum CTD glider data. *J. Atmospheric Ocean. Technol.*, 28 (9): 1065–1071.
- Glenn, S., Jones, C., Twardowski, M., Bowers, L., Kerfoot, J., Kohut, J., Webb, D., Schofield, O. (2008) Glider observations of sediment resuspension in a Middle Atlantic Bight fall transition storm. *Limnol. Oceanogr.*, 53 (5, part 2): 2180–2196.
- Glenn, S., Schofield, O. (2009) Growing a distributed ocean observatory: our view from the COOL room. *Oceanography*, 22 (2): 128–145.
- Greeneridge Sciences Inc. (2012) Acousonde 3A Brochure, Greeneridge Sciences Inc. Retrieved from http://www.acousonde.com/downloads/Acousonde3A_Brochure.pdf
- Guihen, D., Fielding, S., Griffiths, G., Creed, E., Murphy, E., Heywood, K. (2012) Developing glider techniques for estimating krill biomass. *Abstr. Book 15th Bienn. Chall. Conf. Mar. Sci.*, pp. 128, Presented at the The 15th Biennial Challenger Conference for Marine Science, University of East Anglia, Norwich, UK. Retrieved from <http://challenger2012.org.uk/documents/153957/0/Abstractbook.pdf/4a5a992f-030b-4b18-92cb-d07d02e4f1b2>
- Hanson, A. K., Donaghay, P. L., Moore, C., Arrieta, R. (2006) Transitioning submersible chemical analyzer technologies for sustained, autonomous observations from profiling moorings, gliders and other AUVs, pp. 8, US Office of Naval Research, Washington, D.C. Retrieved from www.dtic.mil/cgi-bin/GetTRDoc?AD=ADA475450

D5.2

- Hanson, A. K., Kusterbeck, A. W. (2009) Developing ChemFin™, a miniature biogeochemical sensor payload for gliders, profilers, and other AUVs, pp. 8, US Office of Naval Research, Washington, D.C. Retrieved from www.dtic.mil/cgi-bin/GetTRDoc?AD=ADA531967
- Hanson, A. K., Kusterbeck, A. W. (2010) Developing ChemFin™, a miniature biogeochemical sensor payload for gliders, profilers, and other AUVs, pp. 7, US Office of Naval Research, Washington, D.C. Retrieved from <http://www.onr.navy.mil/reports/FY10/nphanso.pdf>
- Hanson, A. K., Kusterbeck, A. W. (2011) Developing ChemFin™, a miniature biogeochemical sensor payload for gliders, profilers, and other AUVs, pp. 6, US Office of Naval Research, Washington, D.C. Retrieved from <http://www.onr.navy.mil/reports/FY11/npahanso.pdf>
- Herren, C. M., Haddock, S. H. D., Johnson, C., Orrico, C. M., Moline, M. A., Case, J. F. (2005) A multi-platform bathyphotometer for fine-scale, coastal bioluminescence research. *Limnol. Oceanogr. Methods*, 3: 247–262.
- Holm-Hansen, O., Amos, A., Hewes, C. (2000) Reliability of estimating chlorophyll a concentrations in Antarctic waters by measurement of in situ chlorophyll a fluorescence. *Mar. Ecol. Prog. Ser.*, 196: 103–110.
- Hurst, T., Johnson, M., Fratantoni, D., Baumgartner, M. (2012) Beta Testing of Persistent Passive Acoustic Monitors, pp. 18, US Office of Naval Research, Washington, D.C. Retrieved from <http://www.onr.navy.mil/reports/FY11/mbhurst.pdf>
- Imagenex. (2013) Imagenex model 853 Scientific Echo Sounder with Data Logger, Imagenex. Retrieved from http://www.imagenex.com/853_ES_with_Data_Logger_Specs_rev6.pdf
- iRobot. (2012) iRobot Seaglider: the AUV for science and industry, iRobot. Retrieved from <http://www.irobot.com/us/robots/Maritime/Seaglider.aspx>
- Janzen, C. D. (2011) Improving CTD data from gliders by optimizing sample rate and flow past sensors. *Ocean News Technol.*, 17 (7): 22–23.
- Janzen, C. D., Creed, E. L. (2011) Physical oceanographic data from Seaglider trials in stratified coastal waters using a new pumped payload CTD. *Proc. Oceans 2011*, pp. 1–7, Presented at the Oceans 2011, Curran Associates, Kona, Hawaii, USA.
- JFE ALEC Co. (2010) RINKO Fastest-Optical Oxygen Sensor, Rockland Scientific. Retrieved from <http://www.rocklandocean.com/index.php?pageid=5&productid=47>
- Johnson, K., Byrne, B., Balch, B., Bender, M., Benner, R., Bishop, J., Buesseler, K., Carr, M.-E., Chavez, F., Emerson, S., Feely, D., Karl, D., Lee, C., Sabine, C., Steinberg, D. (2000) Modern observing systems working group summary, OCTET Workshop, pp. 11, OCTET. Retrieved from http://www.msrb.sunysb.edu/octet/mod_obs_sys.html
- Johnson, K. S., Coletti, L. J. (2002) In situ ultraviolet spectrophotometry for high resolution and long-term monitoring of nitrate, bromide and bisulfide in the ocean. *Deep-Sea Res. I*, 49: 1291–1305.
- Joint Analysis Group for the Deepwater Horizon Oil Spill. (2011) Review of R/V Brooks McCall data to examine subsurface oil. NOAA Technical Report NOS OR&R 24 (No. 24), pp. 64, NOAA. Retrieved from <http://service.ncddc.noaa.gov/rdn/www/media/documents/activities/jag-reports/NTR-NOS-ORR-24-062011.pdf>
- Jolliff, J. K., Gould, R. W., Penta, B., Teague, W. J., DeRada, S., Chavez, F. P., Arnone, R. A. (2012) Water mass bio-optical properties in the Monterey Bay region: Fluorescence-based inference of shifts in phytoplankton photophysiology. *J. Geophys. Res.*, 117 (C7).
- Jones, C., Webb, D., Glenn, S., Schofield, O., Kerfoot, J., Kohut, J., Aragon, D., Haldeman, C., Haskin, T., Kahl, A., Hunter, E. (2011) Slocum glider - expanding the capabilities. *Proc. 17th Int. Symp. Unmanned Untethered Submers. Technol. UUST11*, Presented at the 17th International Symposium on Unmanned Untethered Submersible Technology (UUST11), Autonomous Undersea Systems Institute, Portsmouth, New Hampshire. Retrieved from http://auvac.org/uploads/publication_pdf/Jones-UUST11_Slocum_Glider.pdf
- Klinck, H., Mellinger, D. K., Klinck, K., Bogue, N. M., Luby, J. C., Jump, W. A., Shilling, G. B., Litchendorf, T., Wood, A. S., Schorr, G. S., Baird, R. W. (2012) Near-real-time acoustic monitoring of beaked whales and other cetaceans using a Seaglider™. (A. Fahlman, Ed.) *PLoS ONE*, 7 (5): e36128.

D5.2

- Lavigne, H., D'Ortenzio, F., Claustre, H., Poteau, A. (2012) Towards a merged satellite and in situ fluorescence ocean chlorophyll product. *Biogeosciences*, 9 (6): 2111–2125.
- Ma, B. B., Nystuen, J. A., Lien, R.-C. (2005) Prediction of underwater sound levels from rain and wind. *J. Acoust. Soc. Am.*, 117 (6): 3555.
- Mankins, J. C. (1995) Technology Readiness Levels: A White Paper, pp. 5, NASA, Washington, D.C.
- Merckelbach, L. M., Briggs, R. D., Smeed, D. A., Griffiths, G. (2008) Current measurements from autonomous underwater gliders. *Proc. IEEE/OES/CMTN Ninth Work. Conf. Curr. Meas. Technol.*, pp. 61–67, Presented at the The IEEE/OES/CMTN Ninth Working Conference on Current Measurement Technology, IEEE, Charleston, South Carolina. Retrieved from <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4480845>
- Mignot, A., Claustre, H., D'Ortenzio, F., Xing, X., Poteau, A., Ras, J. (2011) From the shape of the vertical profile of in vivo fluorescence to Chlorophyll-a concentration. *Biogeosciences*, 8 (8): 2391–2406.
- NBOSI. (2013) CT Sensor Specifications.
- NCCOOS. (2012) Ramses optode. *N. C. Coast. Ocean Obs. Syst.* Retrieved July 2, 2013, from <http://nccoos.org/projects/long-bay-wintertime-blooms/gallery/2012-04-13/p1010053.jpg/view?searchterm=ramses>
- Nelson, N. B., Siegel, D. A. (2002) Chromophoric DOM in the open ocean. In: *Biogeochemistry of marine dissolved organic matter* (D. A. Hansell & C. A. Carlson, eds.), pp. 547–578, Academic Press, Amsterdam and Boston.
- NOC. (2013) Chemical microsensors - Instruments and sensors. Retrieved July 10, 2013, from <http://noc.ac.uk/science-technology/research-groups/ote/instruments-sensors/chemical-microsensors>
- Nortek. (2011) Nortek develops acoustic doppler current profiler for the iRobot 1KA Seaglider, Nortek. Retrieved from <http://www.nortekusa.com/en/news/nortek-releases-new-glider-adcp-at-oceans-conference>
- Nortek. (2013) Aquadopp Profiler. Retrieved from <http://www.nortekusa.com/usa/products/current-profilers/aquadopp-current-profiler-brochure>
- Oliver, M. J. (2012) OTIS mission success | MARACOOS. *MARACOOS - Ocean Inf. Chang. World.* Retrieved June 20, 2013, from <http://maracoos.org/content/otis-mission-success>
- Oliver, M. J., Breece, M. W., Fox, D. A., Haulsee, D. E., Kohut, J. T., Manderson, J., Savoy, T. (2013) Shrinking the haystack: Using an AUV in an integrated ocean observatory to map Atlantic sturgeon in the coastal ocean. *Fisheries*, 38 (5): 210–216.
- Ordonez, C. E. (2012) *Absolute water velocity profiles from glider-mounted acoustic Doppler current profilers*. M.Sc. Thesis, Oregon State University, U.S.A., Corvallis, Oregon. Retrieved from <http://ir.library.oregonstate.edu/xmlui/bitstream/handle/1957/36080/OrdonezChristopherE2012.pdf?sequence=1>
- Peterson, A. K., Fer, I. (2014) Dissipation measurements using temperature microstructure from an underwater glider. *Methods Oceanogr.* Retrieved from <http://linkinghub.elsevier.com/retrieve/pii/S2211122014000231>
- Picheral, M., Guidi, L., Stemann, L., Karl, D. M., Iddaoud, G., Gorsky, G. (2010) The Underwater Vision Profiler 5: An advanced instrument for high spatial resolution studies of particle size spectra and zooplankton. *Limnol. Oceanogr. Methods*, 8: 462–473.
- Pidcock, R., Srokosz, M., Allen, J., Hartman, M., Painter, S., Mowlem, M., Hydes, D., Martin, A. (2010) A novel integration of an ultraviolet nitrate sensor on board a towed vehicle for mapping open-ocean submesoscale nitrate variability. *J. Atmospheric Ocean. Technol.*, 27 (8): 1410–1416.
- PLOCAN. (2013) Gliders Fleet. *PLOCAN Glid. Fleet.* Retrieved June 2, 2013, from <http://www.plocan.eu/en/plocan-overview/gliders-fleet.html>
- Poryvkina, L., Babichenko, S., Kaitala, S., Kuosa, H., Shalapjonok, A. (1994) Spectral fluorescence signatures in the characterization of phytoplankton community composition. *J. Plankton Res.*, 16 (10): 1315–1327.

D5.2

- Rockland Scientific. (2013) MicroRider-1000: Modular, Self-contained Turbulence Profiler. Retrieved from <http://www.rocklandscientific.com/LinkClick.aspx?fileticket=2QpE2AQoUco%3d&tabid=133>
- Rockland Scientific. (2013) MicroRider-1000. Retrieved July 4, 2013, from <http://www.rocklandscientific.com/Products/ModularSystems/MicroRider/tabid/133/Default.aspx>
- Rusello, P. J. (2012) *The past, present, and future of Nortek and Glider measurements*, Presented at the Oceans '12, Hampton Roads, Virginia. Retrieved from <http://www.nortekusa.com/lib/technical-notes/ad2cp-glider-current-and-future-work>
- Rusello, P. J., Siegel, E., Alford, M. H. (2011) High resolution Doppler profiler measurements of turbulence from a profiling body. *Proc. IEEE/OES/CWTM Tenth Work. Conf. Curr. Meas. Technol.*, pp. 259–265, Presented at the The IEEE/OES/CWTM Tenth Working Conference on Current Measurement Technology, IEEE, Monterey, California, U.S.A. Retrieved from <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=5759562>
- Satlantic. (2012) Satlantic PAR sensor. Retrieved from <http://satlantic.com/node/281>
- Satlantic. (2013) Operation Manual for the OCR-504. Retrieved from <http://satlantic.com/node/281>
- Satlantic. (2013) SUNA Manual. Retrieved from <http://satlantic.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://satlantic.com/sites/default/files/documents/SUNA-Manual.pdf&nid=431>
- Satlantic. (2013) Satlantic. Retrieved July 4, 2013, from <http://satlantic.com/>
- Schmitt, R., Petitt, R. (2006) A fast response, stable CTD for gliders and AUVs. *MTS/IEEE Oceans 2006 Conf. Proc.*, pp. 1–5, Presented at the MTS/IEEE Oceans 2006 Conference, IEEE, Boston, Massachusetts. Retrieved from <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4099062>
- Schofield, O., Moline, M., Cahill, B., Frazer, T., Kahl, A., Oliver, M., Reinfelder, J., Glenn, S., Chant, R. (2013) Phytoplankton productivity in a turbid buoyant coastal plume. *Cont. Shelf Res.*, 63 (Supplement): S138–148.
- Sea-Bird. (2007) Premium CTD temperature sensor SBE 3plus, Sea-Bird. Retrieved from http://www.seabird.com/products/spec_sheets/3pdata.htm
- Sea-Bird. (2010) Slocum Glider Payload CTD, Sea-Bird. Retrieved from http://www.seabird.com/pdf_documents/Datasheets/SlocumGliderPayloadCtdBrochureOct10.pdf
- Sea-Bird. (2012) Glider Payload CTD, Sea-Bird. Retrieved from http://www.seabird.com/pdf_documents/Datasheets/GliderPayloadCTDBrochureJul12.pdf
- Sea-Bird. (2012) Conductivity sensor SBE 4, Sea-Bird. Retrieved from http://www.seabird.com/pdf_documents/Datasheets/04brochureMar12.pdf
- Sea-Bird. (2012) Sea-Bird dissolved oxygen sensor SBE-43, Sea-Bird. Retrieved from http://www.seabird.com/pdf_documents/Datasheets/43brochureDec12.pdf
- Seapoint Sensors Inc. (2013) Seapoint chlorophyll fluorometer. Retrieved from http://www.seapoint.com/pdf/scf_ds.pdf
- Seapoint Sensors Inc. (2013) Seapoint turbidity meter. Retrieved from http://www.seapoint.com/pdf/scf_ds.pdf
- Siegel, E., Rusello, P. J. (2013) Improving ocean current measurement from gliders. *Sea Technol.*, 54 (4): 35–37.
- Stemmann, L., Boss, E. (2012) Plankton and particle size and packaging: From determining optical properties to driving the biological pump. *Annu. Rev. Mar. Sci.*, 4 (1): 263–290.
- SubChem Systems Inc. (2009) MARCHEM Analyzer, SubChem Systems Inc. Retrieved from http://www.subchem.com/MarChem_Analyzer.pdf
- SubChem Systems Inc. (2011) Autonomous Profiling Nutrient Analyzer (APNA), SubChem Systems Inc. Retrieved from [http://www.subchem.com/Autonomous Profiling Nutrient Analyzer \(APNA\).pdf](http://www.subchem.com/Autonomous_Profiling_Nutrient_Analyzer(APNA).pdf)

D5.2

- SubChem Systems Inc. (2011) ChemFin Nutrient Analyzer, SubChem Systems Inc. Retrieved from <http://www.subchem.com/ChemFin Analyzer.pdf>
- SubChem Systems Inc. (2013) SubChem Systems Inc. Retrieved July 5, 2013, from <http://www.subchem.com/>
- Tedetti, M., Goutx, M. (2012) Submersible fluorometer based on deep-ultraviolet LEDs for the detection of phenanthrene- and tryptophan-like compounds in marine waters. French Patent, CNRS, n° FR 2972260.
- Tedetti, M., Guigue, C., Goutx, M. (2010) Utilization of a submersible UV fluorometer for monitoring anthropogenic inputs in the Mediterranean coastal waters. *Mar. Pollut. Bull.*, 60 (3): 350–362.
- Tedetti, M., Joffre, P., Goutx, M. (2013) Development of a field-portable fluorometer based on deep ultraviolet LEDs for the detection of phenanthrene- and tryptophan-like compounds in natural waters. *Sens. Actuators B Chem.*, 182: 416–423.
- Teledyne RD Instruments. (2011) Explorer PA Doppler Velocity Log (DVL). Retrieved from http://www.rdinstruments.com/pdfs/explorer_pa_ds_lr.pdf
- Teledyne RD Instruments. (2012) Teledyne RD Instruments Acoustic Doppler Current Profiler to be integrated into Teledyne Webb Research Slocum Glider to support Ocean Observatories Initiative, Teledyne RD Instruments. Retrieved from www.rdinstruments.com/pdfs/trdi-glider-OOI.pdf
- Teledyne RD Instruments. (2013) Explorer ADCP mounted to Teledyne Webb Research Slocum Glider, Teledyne RD Instruments. Retrieved from http://www.rdinstruments.com/pdfs/slocum_liquid_appnote_hr.pdf
- Teledyne Webb Research. (2010) G2 Slocum Glider, Teledyne Webb Research. Retrieved from <http://www.webbresearch.com/slocumglider.aspx>
- Teledyne Webb Research. (2013) G2 Slocum Glider Product Catalogue, Teledyne Webb Research. Retrieved from http://www.webbresearch.com/pdf/G2_Product_Catalog.pdf
- Tengberg, A., Hovdenes, J., Barranger, D., Brocandel, O., Diaz, R., Sarkkula, J., Huber, C., Stangelmayer, A. (2003) Optodes to measure oxygen in the aquatic environment. *Sea Technol.*, 44 (2): 10–20.
- Testor, P. et al. (2010) Gliders as a component of future observing systems. *Proc. Ocean. Sustain. Ocean Obs. Inf. Soc. Vol 2* (J. Hall, D. E. Harrison & D. Stammer, eds.), Vol. 2, pp. 961–978, Presented at the OceanObs'09, European Space Agency, Venice, Italy.
- Tintoré, J., Testor, P., Smeed, D., Beguery, L., Pouliquen, S., Heslop, E., Martínez-Ledesma, M., Cusí, S., Torner, M., Ruiz, S., Merckelbach, L., Knight, P. (2013) Report on current status of glider observatories within Europe. JERICO Deliverable D3.2, pp. 104. Retrieved from <http://www.jerico-fp7.eu/deliverables/d32-report-on-current-status-of-glider-observatories-within-europe>
- Todd, R. E., Rudnick, D. L., Mazloff, M. R., Davis, R. E., Cornuelle, B. D. (2011) Poleward flows in the southern California Current System: Glider observations and numerical simulation. *J. Geophys. Res.*, 116: C02026, doi:10.1029/2010JC006536.
- TriOS Optical Sensors. (2013) TriOS enviroFlu-HC - UV-fluorometer for PAH (polycyclic aromatic hydrocarbons) detection in water. Retrieved September 24, 2013, from http://www.trios.de/index.php?option=com_content&view=article&id=86&catid=59&Itemid=85&lang=en
- Turner Designs. (2013) Cyclops-7 Submersible Sensors. *Turn. Des.* Retrieved from <http://www.turnerdesigns.com/products/submersible-fluorometer/cyclops-7-submersible-fluorescence-and-turbidity-sensors>
- VEMCO. (2013) Vemco | Acoustic Telemetry. VEMCO. Retrieved June 15, 2013, from <http://vemco.com/>
- Waldmann, C., Tamburri, M., Prien, R. D., Fietzek, P. (2010) Assessment of sensor performance. *Ocean Sci.*, 6: 235–245.

D5.2

- WETLabs. (2009) ECO Puck, WETLabs. Retrieved from <http://www.wetlabs.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://www.wetlabs.com/sites/default/files/documents/ECO-PUCK-2Dec2009.pdf&nid=421>
- WETLabs. (2009) BAM, WETLabs. Retrieved from <http://www.wetlabs.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://www.wetlabs.com/sites/default/files/documents/BAM-8Jul2009.pdf&nid=414>
- WETLabs. (2010) Underwater Bioluminescence Assessment Tool (UBAT) Hardware User's Guide, WETLabs. Retrieved from <http://www.wetlabs.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://www.wetlabs.com/sites/default/files/documents/ubathwb.pdf&nid=604>
- WETLabs. (2011) ECO Triplet, WETLabs. Retrieved from <http://www.wetlabs.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://www.wetlabs.com/sites/default/files/documents/Triplet-Puck-Manual.pdf&nid=441>
- WETLabs. (2011) ECO Three-Measurement Sensor Triplet Puck, WETLabs. Retrieved from <http://www.wetlabs.com/sites/all/modules/pubdlcnt/pubdlcnt.php?file=http://www.wetlabs.com/sites/default/files/documents/Triplet-Puck-Manual.pdf&nid=441>
- WETLabs. (2013) Oil In Water | WET Labs. Retrieved July 6, 2013, from <http://www.wetlabs.com/applications/oil-water>
- Wiggins, S. M., Hildebrand, J. A. (2007) High-frequency Acoustic Recording Package (HARP) for broad-band, long-term marine mammal monitoring, pp. 551–557, Presented at the Symposium on Underwater Technology and Workshop on Scientific Use of Submarine Cables and Related Technologies, IEEE, Tokyo. Retrieved from <http://ieeexplore.ieee.org/lpdocs/epic03/wrapper.htm?arnumber=4231090>
- Woods, N. W., Fratantoni, D. M. (2011) *Measurement of acoustic backscatter and ocean velocity from an autonomous glider*, Presented at the NortekUSA Technical Symposium, Newport, Rhode Island, USA. Retrieved from www.nortekmed.com/usa/library/user-symposium/2011/nick-wood